


Quick start guide for model DS3111-2

Telephone base installation

We recommend that you install the telephone base away from any electronic equipment and appliances such as personal computers, computer routers, television sets, microwave ovens or refrigerators. Avoid excessive heat, cold, dust or moisture. When a location is selected, install the telephone base and the charger as shown below. Make sure that the electrical outlet is not controlled by a wall switch.

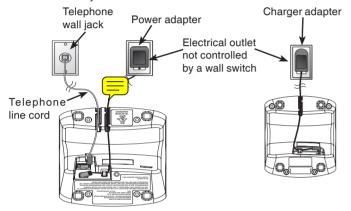


Handset battery installation

Install the handset battery by following these steps:

- Align the two holes of the battery plug with the socket pins in the handset battery compartment, matching the red and black wires to the colorcoded label.
- 2. Place the battery in the compartment with the wires in the lower right corner.
- Position are battery compartment cover and slide it towards the unit until it clicks into place.

For optimal performance, we recommend that you charge the handset for 16 hours. You can keep the battery charged by returning the handset to the telephone base after each use. When the battery power is fully depleted, a full recharge takes about 16 hours.



NOTE:

You must program your voicemail buttons before you can access all of the functions available with your voicemail.

Voicemail setup

This feature allows you to use the VOICEMAIL, PLAY, SKIP and ERASE buttons to access your voicemail (a subscription service available from your local telephone company for a feed for ecompleting these steps, be sure to have your access number and password to access your voicemail available. You will also need the key sequence to play, skip and delete your messages. Contact your local telephone company for more information about voicemail service.

To program the **ACCESS NUMBER** button:

- 1. Press MENU/SELECT from the idle mode.
- Press ▲ or ▼ to select VOICEMAIL SETUP, then press MENU/SELECT.
- Press ▲ or ▼ to select ACCESS NUMBER, then press MENU/SELECT.
- Use the dial pad to enter the access number. Press MUTE/REMOVE to delete characters if necessary.
- 5. Press MENU/SELECT. You'll hear a confirmation tone.

To program the **PASSWORD**, **PLAY**, **SKIP** and **ERASE** buttons, follow the above steps.

To program a pause:

- 1. Press MENU/SELECT from the idle mode.
- Press ▲ or ▼ to select VOICEMAIL SETUP then press MENU/SELECT twice.
- 3. The blinking cursor should be at the end of your access number. Press and hold the REDIAL/PAUSE button until a P appears.
- 4. Press MENU/SELECT. You'll hear a confirmation tone.


To reset all codes:


- 1. Press MENU/SELECT from the idle mode.
- 2. Press ▲ or ▼ to select VOICEMAIL SETUP then press MENU/SELECT.
- Press ▲ or ▼ to select RESET ALL CODES, then press MENU/SELECT.
- 4. The screen displays RESET CODES?
- 5. Press MENU/SELECT. You'll hear a confirmation tone.

Make, receive and end calls

Make a call

 Press TALK/FLASH or ■) to ensure there is a dial tone, then dial the telephone number.





-OR-

- Dial the number (press MUTE/REMOVE to make corrections; press and hold REDIAL/PAUSE to insert a dialing pause).
- 2. Press TALK/FLASH or ■)) to use the speakerphone.

Receive a call

Press TALK/FLASH, ■) or any dialing keys (0-9, * or #) to answer an incoming call.





End a call

 Press OFF/CLEAR or put the handset back in the telephone base or charger.

NOTES:

- Use only the power adapters and batteries supplied with your VTech telephone.
- 2. For complete feature instructions, please refer to your user's manual.

IMPORTANT!

If your product is not working properly:

- Refer to the Troubleshooting section of the user's manual.
- Visit our website at www.vtechphones.com.
 In Canada, go to www.vtechcanada.com.
- Call our customer service at 1 (800) 595-9511.
 In Canada, call 1 (800) 267-7377.

96-006499-030-100 issue 2

QSG DS3111-2 071207.indd 1 7/28/2007 5:54:04 PM