


Go to [www.vtechphones.com](http://www.vtechphones.com) to register your product for enhanced warranty support and the latest VTech product news.

# vtech®

## Quick start guide

VM3253  
VM3253-2  
Video Monitor

### WHAT'S IN THE BOX

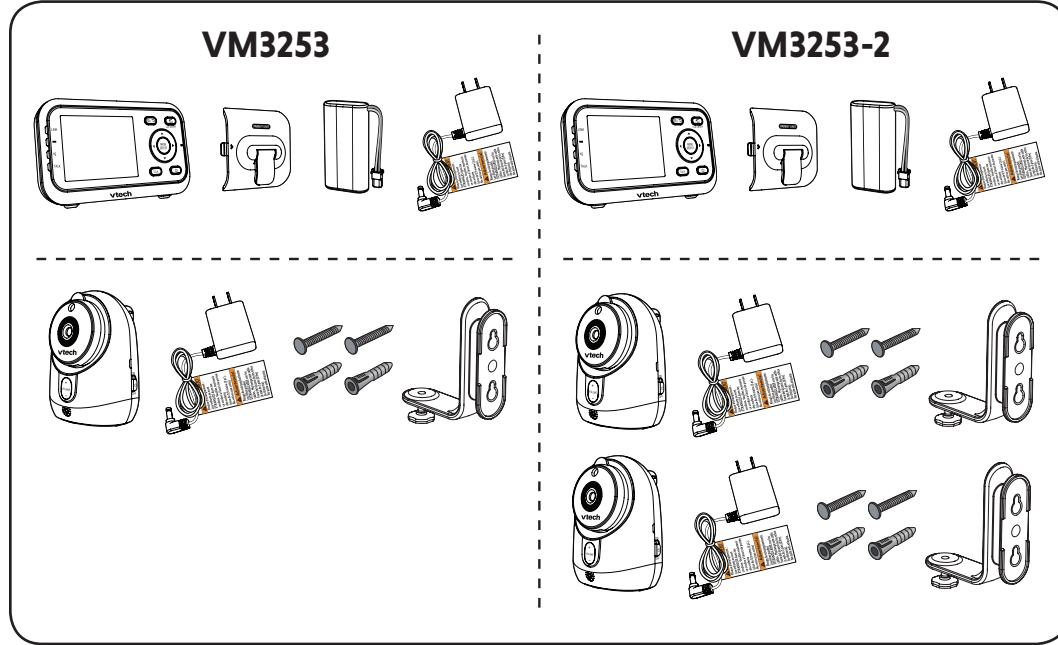

### 2 CONNECT THE BABY MONITOR

**NOTES**

- Use only the power adapters supplied with this product.
- Make sure the baby monitor is not connected to the switch controlled electric outlet.
- Connect the power adapters in a vertical or floor mount position only. The adapters' prongs are not designed to hold the weight of baby monitor, so do not connect them to any ceiling, under-the-table, or cabinet outlets. Otherwise, the adapters may not properly connect to the outlets.
- Make sure the parent unit, the baby unit and the power adapter cords are out of reach of children.

### 4 POSITIONING THE BABY MONITOR

**1**

**2**

**3**

**4**

**CAUTION**

- The default volume of your parent unit is level 3, and the maximum volume is level 5. If you experience high-pitched screeching noise from your baby monitor while positioning:
  - Make sure your baby unit and parent unit are more than 1 meter (3 feet) apart, OR
  - Turn down the volume of your parent unit.

**NOTE**

- To avoid interference from other electronic devices, place your baby monitor at least 3 feet (1 meter) away from devices such as wireless routers, microwaves, cell phones and computers.

### BASIC OPERATION - PARENT UNIT

**Adjust speaker volume**

Press **VOL+** / **VOL-** to adjust your parent unit speaker volume.

The sound sensitivity setting also affects the speaker volume. For details, refer to **Sound sensitivity and sound activation**.

**Zoom**

Press **Q** to zoom in or out.

**Use the menu**

Press **MENU** to enter the menu, or save a setting. You can use the parent unit for advanced settings or operations, such as to play or stop the baby unit lullaby, or to adjust the baby unit sound sensitivity.

**While in the menu:**

- Press **◀** or **▶** to scroll among the menu options.
- Press **SELECT** or **▲** to enter the desired submenu.
- Press **▲** or **▼** to select an item.
- Press **SELECT** to confirm your selection.
- Press **↶** or **↷** to exit the submenu.

**Submenu**

**Main menu**

### 1 INSTALL THE BATTERY

**1**

**2**

**3**

### 3 POWER ON OR OFF THE BABY MONITOR

**1** Slide the **ON/OFF** switch to power on or off your baby unit.

**2** Press and hold **⏻** to power on or off your parent unit.

### 5 STATUS CHECK

Once you power on both your baby unit and parent unit, your parent unit displays image from the baby unit, and the **LINK** LED light turns on.

The **POWER** LED light of baby unit turns on.

#### Talk to your baby unit

Press and hold **TALK** and speak to your parent unit. Your voice is transmitted to the baby unit.

#### Turn off the screen

Press and hold **LCD ON/OFF** to switch off the screen. You can still hear sound from the selected baby unit.

**TIP**


- Press any keys on the parent unit to turn on the screen again.

### BASIC OPERATION - BABY UNIT


**Adjust speaker volume**

Press **+ / VOLUME** / **-** to adjust your baby unit speaker volume. It determines the lullaby volume and talkback volume transmitted from your parent unit.

## OVERVIEW - PARENT UNIT

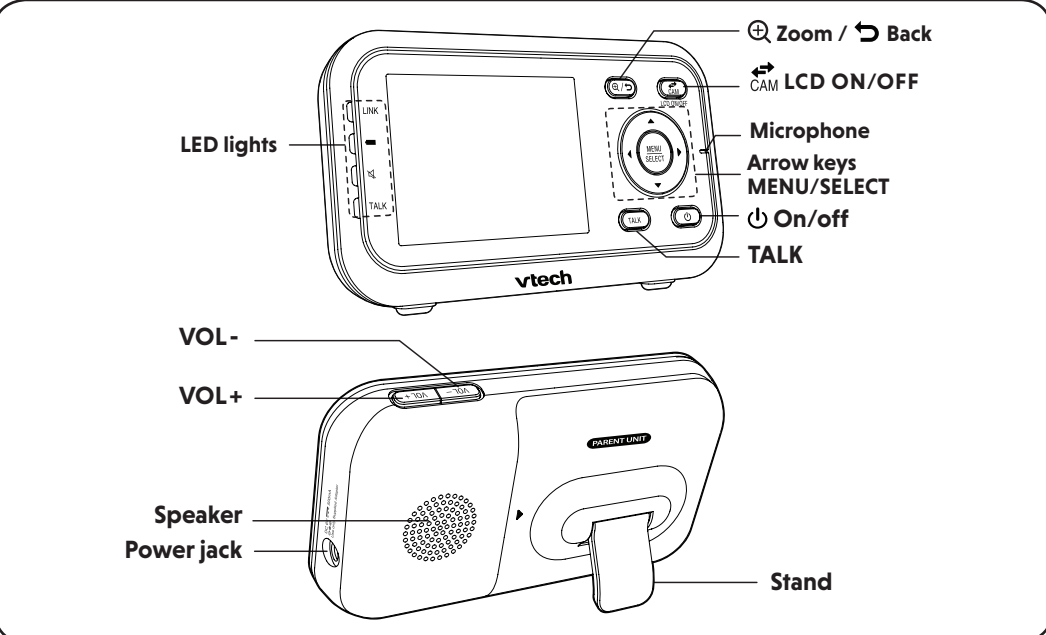

## OVERVIEW - BABY UNIT

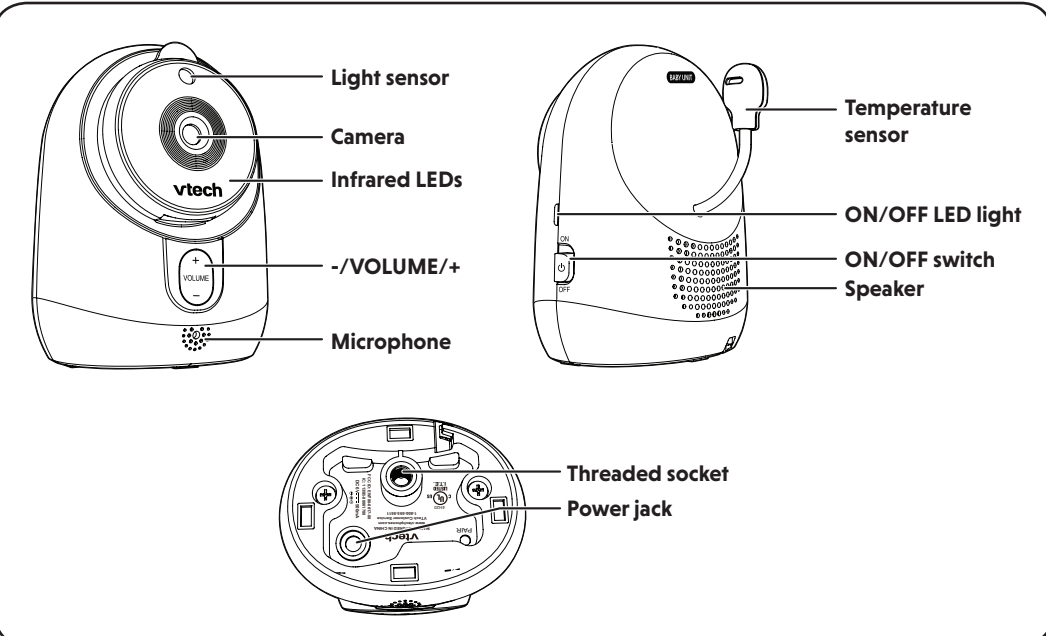

## SOUND SENSITIVITY AND SOUND ACTIVATION

### Adjust sound detection sensitivity

With sound sensitivity setting, you can choose to hear sounds from the baby unit all the time, or to hear sounds that exceed a certain level.

| Parent unit setting            | What happens...  | You may experience...   | What you could do...   |
|--------------------------------|--|---|--|
| Speaker volume: Low            | Hear all sounds all the time, including background sounds.         | Difficulty in hearing your baby's soft sounds if the background sounds are louder.                  | • Increase parent unit's speaker volume, and lower sound sensitivity.<br>• If you are using a white noise machine or sound machine, set its volume to low, or relocate it to minimize background sounds. |
| Sensitivity: Highest [Default] | Only hear sounds that exceed the selected sound sensitivity level. | No sound; or sounds that cut in and out at times as the baby unit may not detect extra soft sounds. | Increase the sound sensitivity, and adjust the volume level if necessary.  |

For details, please see **Adjust the sound sensitivity of the baby unit** in the User's manual.

### Sound activated screen

When sound activation is on, the parent unit screen stays off to save power when the baby unit detects no sound.

Once the baby unit detects sounds that are louder than the chosen sound sensitivity level, the parent unit screen turns on automatically. It will then turn off again after 50 seconds of no sound detection.

## MOUNT THE BABY UNIT (OPTIONAL)

### NOTE

- The types of screws and anchors you need depend on the composition of the wall.

### NOTE

- Check for reception strength and camera angle before drilling the holes.

Place the wall mount bracket on a wall and then use a pencil to mark the top hole and the bottom hole as shown. Remove the wall mount bracket and drill two holes in the wall (7/32 inch drill bit).

### NOTE

- If you drill the holes into a stud, go to step 3.
- OR- If you drill the holes into an object other than a stud, insert the wall anchors into the holes. Tap gently on the ends with a hammer until the wall anchors are flush with the wall.

### OR

## FOR VM3253-2 ONLY

### Status check - Two baby units

If you are viewing baby unit 1, the **POWER** LED light of baby unit 1 turns on. As baby unit 2 is not being viewed, its **POWER** LED light flashes.

### NOTE

- If you power on only one baby unit, your parent unit may display and the LINK LED light flashes. Press **CAM** to switch to the baby unit you have powered on.

### Change different views - Patrol

Press **MENU** when the parent unit is idle. Press or to choose , then press **SELECT** or . Press or to choose **ON**, then press **SELECT** to confirm your selection.

### Change different views - Single-cam

Press **CAM** to switch to another camera in **SINGLE-CAM** mode.