
Modern Styling, Feature-Rich Corded Phone, Antibacterial & Anti-Fingerprint; Perfect for Today's Modern Hotel Rooms



vtech[®] | Hospitality

SIP Contemporary Corded Hotel Telephone

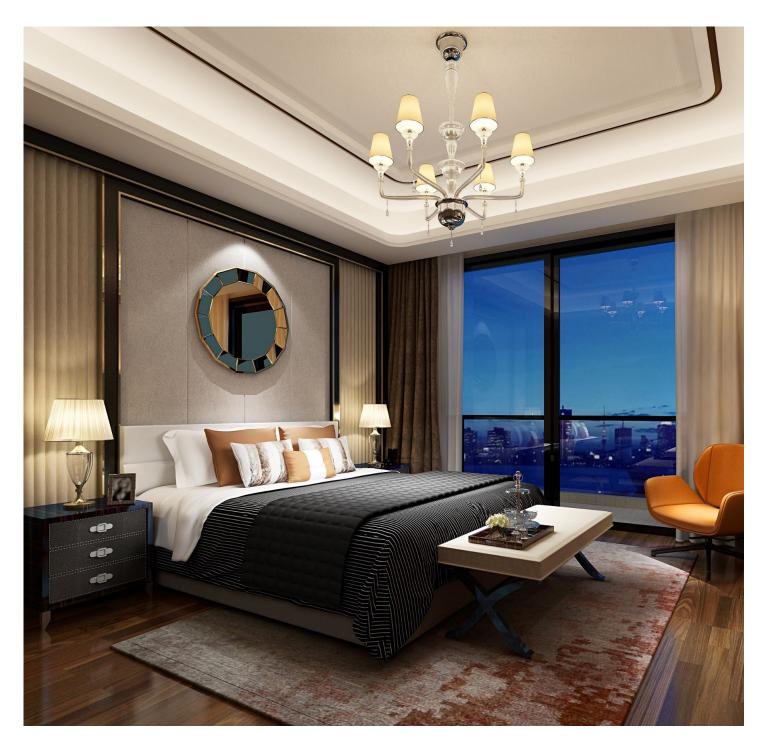

S2210-X (1-Line) 0 Speed Dials Silver/Black



S2210-X (1-Line) 10 Speed Dials Silver/Pearl



S2220-X (2-Line) 10 Speed Dials Matte Black

GENERAL FEATURES

- Antibacterial Plastic: Inhibits 99.9% of bacteria growth
- Special Finish: On handset rear and base plate resists fingerprint smudges and scratches
- High-Quality Base Speakerphone: For hands-free operation
- Customisable Faceplate: For hotel branding and dialing instructions
- Dual-Line Support: 2 lines with line key indication (Applicable to S2220-X)
- Advanced SIP Configuration Tool: Facilitates easy mass deployment and phone monitoring

PHONE FEATURES

- Flash, Hold, Mute, and Redial: Basic telephony functions
- Redial Last Number: Automatically expires in 15 minutes to protect guest privacy
- 10/100/1000 Mbps RJ45 Switched Computer Port: Provides HSIA for guest computers
- Base Dial Pad: For additional convenience
- Compatibility: Compatible with all major PBXs
- Power over Ethernet (PoE): Telephone features work without AC power
- Hearing-Aid Compatible: Ensures accessibility for users with hearing aids
- Visual Message Waiting Indicator: Alerts guests of new messages
- Multi-Step Volume Control: For ringer, handset, and speakerphone
- Selectable Ring Tones: Customizable ring tones
- Programmable Speed Dials: Up to 10 removable, programmable speed dials on base
- VLAN Tagging Support: For network management
- Mounting Options: Desk or wall-mountable base unit
- Sturdy Construction: Ensures phone stays in place on a table or desk
- Environmentally Friendly: RoHS program reduces the use of hazardous substances including lead, mercury, and cadmium

APAC Email: marten_leung@vtech.com Tel: +852 2680 1443



vtech[®] | Hospitality

SPECIFICATIONS

- Colours: Matte Black, Silver/Black, Silver/Pearl
- **Compatibility:** Compatible with all major PBXs
- Message Waiting Signal Type: Varies by PBX, including SIP RFC 3261
- Power Source: PoE Class 2
- Humidity: 45% 85%
- Temperature: 5°C 45°C

CERTIFICATIONS

- HAC
- CE
- RoHS
- UKCA

CORDS & ACCESSORIES	S2210-X S2220-X
Standard LAN Cable w/RJ45 Connectors (Base)	10' (3 meters)
Standard Coiled Handset Cord	12' (3.66 meters)
Wall Mount for Base	Included

DIMENSIONS

Phone Measurements	INCHES	CENTIMETERS	WEIGHT
S2210-X / S2220-X (Desk Mounted)	8.1" x 6" x 4.2"	20.6cm x 15.3cm x 10.7cm	2.09lbs (946g)
S2210-X / S2220-X (Wall Mounted)	2.7" x 6" x 8.5"	6.9cm x 15.3cm x 21.5cm	

Carton Measurements (12 pcs per carton)

S2210-X / S2220-X	22" x 17.8" x 9.3"	56cm x 45cm x 23.6cm	31.77lbs (14.41kg)
-------------------	--------------------	----------------------	--------------------

Note: Some features may be revised subject to final design of hardware and software platform.