




## i 5871 5.8 GHz SYSTEM QUICK START GUIDE


This guide will help you set up your i 5871 system, for complete instructions, please see the i 5871 user's manual

### The Perfect Blend of Form and Function

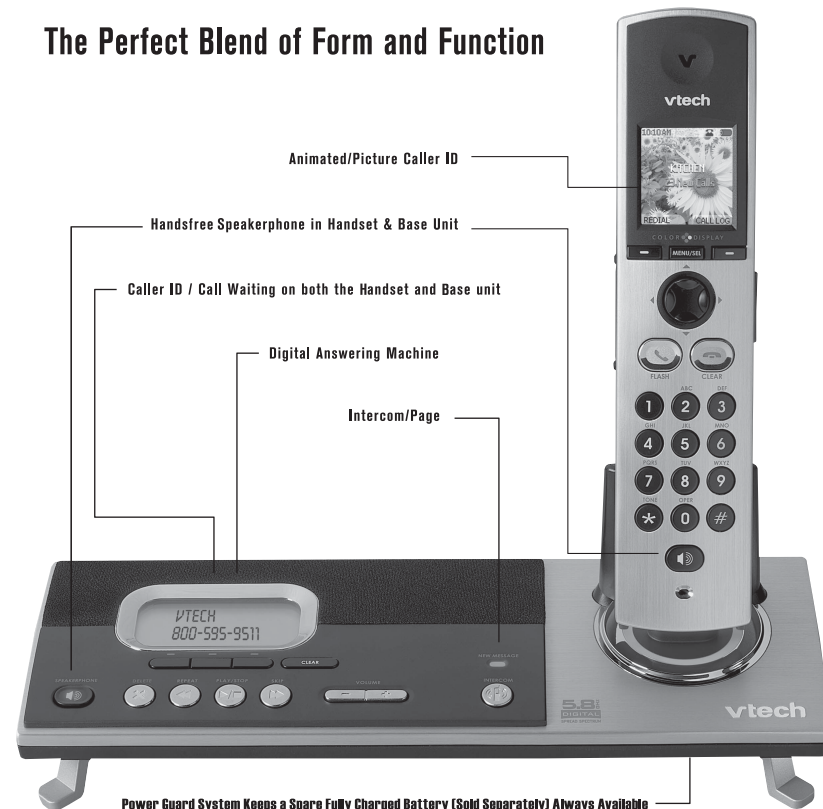

### Installation of Battery in Handset

1. Remove the battery cover and place the battery in the compartment with the metal contacts aligning, as shown in the diagram.
2. Replace the cover by sliding it upwards.

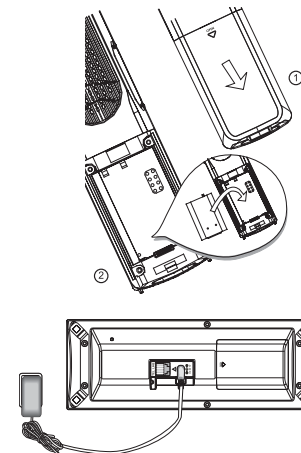

### Setup

1. Plug the power adapter into an electrical outlet, and the connector into the bottom of the base unit.
2. Place the handset in the charger, and allow it to charge for a minimum of 12 hours.

### Making Calls

#### From the handset

- Press /FLASH (on) or to use the handset speakerphone feature.
- Dial the phone number.

#### -OR-

- Press /CLEAR (off) or place the handset back in its base to end your call.
- Press **OFF** to end your call or place the handset in its base to end your call.

#### From the base unit:

- With the base unit idle (off), press **MENU**.
- With the call log highlighted press **SELECT**.
- Use the and to scroll to the desired number.

- Press .

- Press to end your call.

### Answering Calls

#### From the Handset

- Press /FLASH (on) , or any dialing keys.
- Press /CLEAR (off) or place the handset back in its base to end your call.

#### -OR-

- Place the handset in its base to end your call.

#### From the Base

- Press .

- Press to end your call.

### Handset Main Menu

Enter the handset main menu options by pressing **MENU/SEL**. Use the and NavKeys to scroll to **Phonebook**, **Call Log**, **Messages**, **Intercom**, **Settings**, **Sounds**, **Pictures** or **Animations**.

### Base Main Menu

With the base unit in idle (off) mode, press the **MENU** key to access the **CALL LOG**, **BASE SETTINGS**, **ANSWERING SYSTEM** and **REGISTER HANDSET** options.



### Caller ID/ Call Waiting ID

#### On the handset

To access the call log, press the **CALL LOG** softkey.

#### - OR -

Press **MENU/SEL**, then the or NavKeys to scroll to call log menu. Press **MENU/SEL**.

Use and NavKeys to scroll and view the CID records in the call log. You can listen to the message while reviewing the call log. While reviewing the call log and the caller has left a message, the screen will display:

- Press the NavKey to play the message.
- Press the **STOP** softkey to stop the message.

If you wish to dial the number from this entry in the call log, press the and NavKeys to make a selection, then press /FLASH (on) or to dial the number.

#### Dialing Tip

With the desired CID displayed, press # or **MENU/SEL** on the handset to scroll through the various dialing options. The possible options to choose from will be either 7, 10, or 11 digits. For example, if the original number in caller ID memory was 800-595-9511, then the display options will be:

#### On the base

With the base unit in idle (off) mode, Press **MENU**, then use the or NavKeys to scroll to call log menu.

- Press **SELECT**. Use and NavKeys to scroll and view the CID records in the call log.
- To dial a number while reviewing the call log, press the and NavKeys to make your selection, then press to dial the number.




Storing a Name and Number in Phonebook

- From the handset idle (off) mode, press the ▲ or ▼ NavKey. Press the **NEW** softkey.
- You will then be prompted to **Enter Name** and **Enter Number**. Use the digit keys to spell the name. If you make a mistake, press the softkey. To add a space between characters, press the 1 key or the ► key twice. When finished, press the **SET** softkey.


**NOTE:** If you do not wish to assign a distinctive ring tone or image to this phonebook entry, press **SAVE** now.

Using the VTech phonebook manager software, you can also create, modify and backup phonebook files from your handset.



Dialing from Phonebook


- With the handset in idle (off) mode, press ▲ or ▼ NavKeys to enter the phonebook.
- Use the ▲ or ▼ NavKeys to scroll to the desired entry.
- With the desired record displayed, press / **FLASH** (on) or to dial the number.



Installation and Registration of Accessory Handset

Your **i 5871** handset comes registered to the base unit. To register additional **i 5808** handsets (purchased separately):


- After charging, the handset will display registration directions, which are as follows:
- On the base unit, press **MENU**, then select **REGISTER HANDSET**.



- When the base unit shows **READY TO REGISTER NEW HANDSET**, press **REGISTER** on the handset.



- The handset displays **Registration in Progress**.




- Within approximately 15 – 60 seconds the base and handset will beep, and the newly registered handset will be assigned the lowest extension number not previously assigned to another system handset (1 – 8).

Answering System Operation

Turn Answering System On/Off

- At the base, press the **MENU** softkey.
- Use the ▲ / ▼ softkeys to scroll to **ANSWERING SYSTEM**, press **SELECT**.
- Scroll to **ANSWER OPTIONS**, press **SELECT**.
- Scroll to your desired selection, press **SET**.
- You'll hear a confirmation beep.

**NOTE:** If the answering system is off, the base screen will display **ANS. OFF**.



For details on recording your own outgoing announcements and changing system settings, see **ANSWERING SYSTEM OPERATION** in your user's manual.