

Go to www.vtechphones.com to register your product for enhanced warranty support and the latest VTech product news.

vtech®


Quick start guide

VM352
VM352-2

Full Color Video Monitor




WHAT'S IN THE BOX

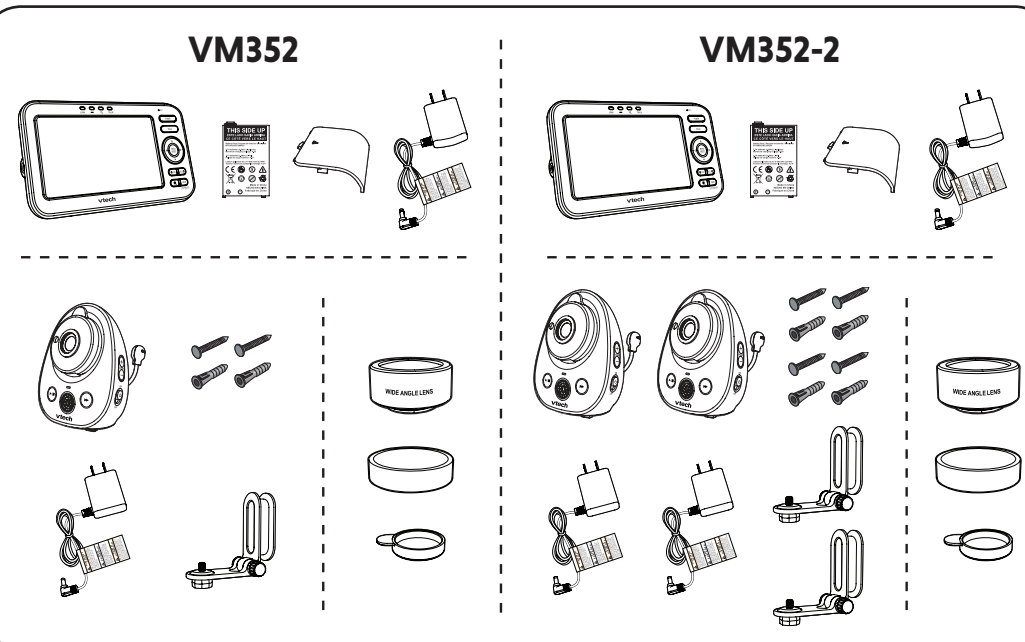


2 CONNECT THE BABY MONITOR

NOTES

- Use only the power adapters supplied with this product.
- Make sure the baby monitor is not connected to an electric outlet that is controlled by a switch.
- Connect the power adapters in a vertical or floor mount position only. The adapters' prongs are not designed to hold the weight of baby monitor, so do not connect them to any ceiling, under-the-table, or cabinet outlets. Otherwise, the adapters may not properly connect to the outlets.
- Make sure the parent unit, the baby units and the power adapter cords are out of reach of children.

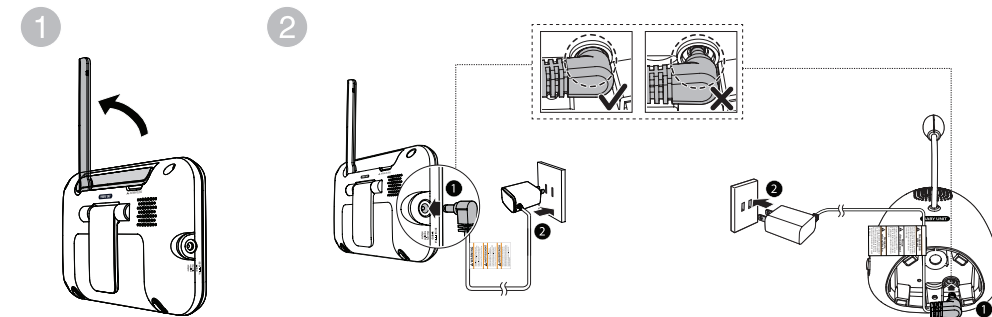


4 POSITIONING THE BABY MONITOR

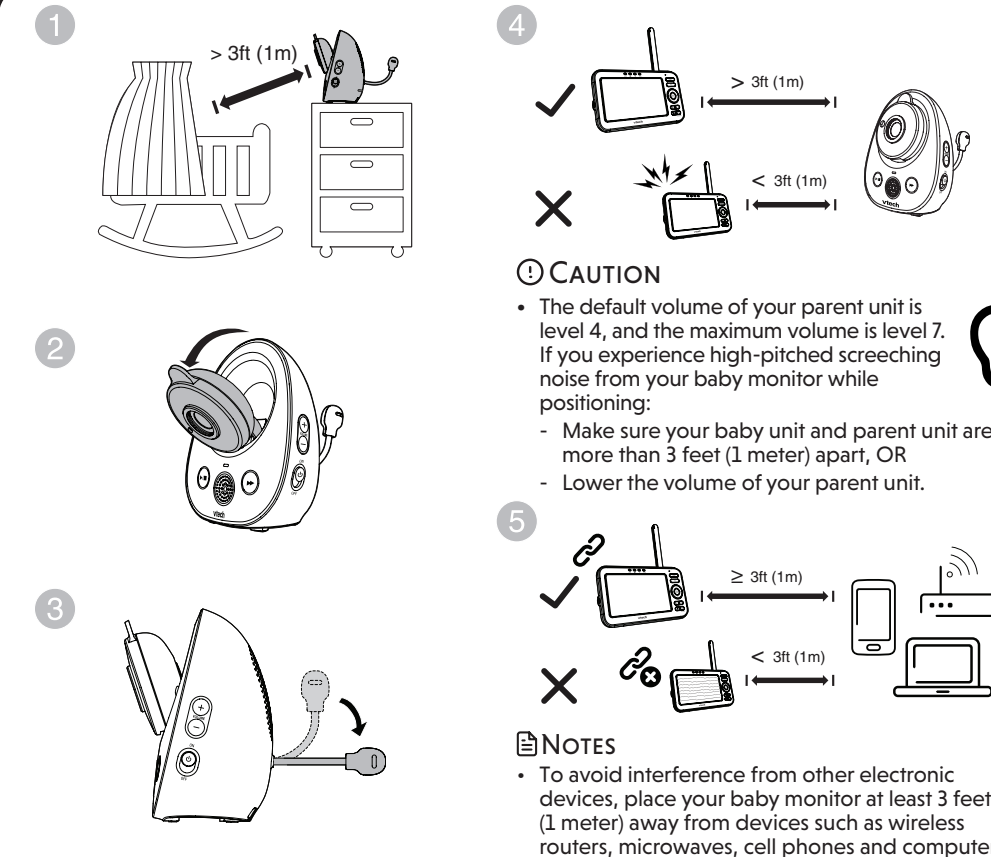

5 STATUS CHECK

Once you power on both your baby unit and parent unit, your parent unit displays image from the baby unit, and the **LINK** LED light turns on.

The **ON/OFF** LED light of baby unit turns on.

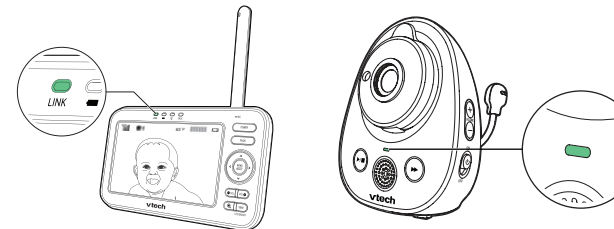


BASIC OPERATION - PARENT UNIT

Adjust speaker volume


Press **VOL -** / **VOL +** to adjust your parent unit speaker volume.

The sound sensitivity setting also affects the speaker volume. For details, refer to **Sound sensitivity and sound activation**.

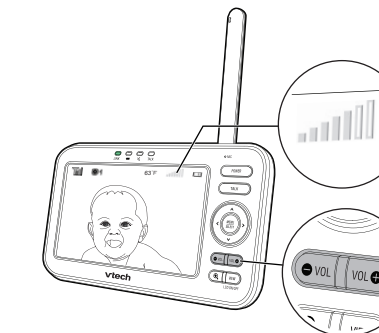


Talk to your baby unit

Press and hold **TALK** and speak to your parent unit. Your voice is transmitted to the baby unit.

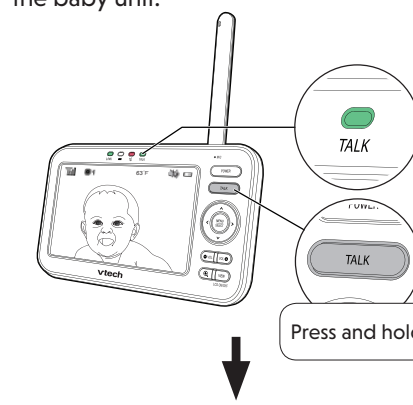

Zoom

Press **Q** to zoom in or out.

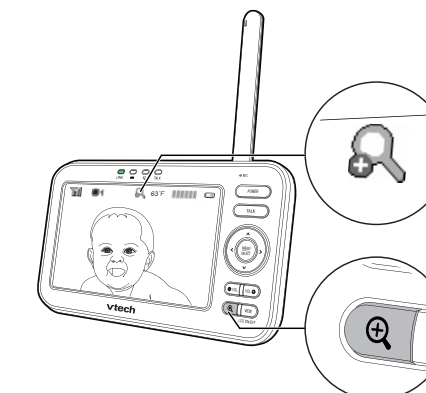


Use the menu


Press **MENU SELECT** to enter the menu, choose a menu item, or save a setting. You can use the parent unit for advanced settings or operations, such as to play or stop the baby unit lullaby, or to adjust the baby unit sound sensitivity.

While in the menu:

- Press **▲** or **▼** to scroll among the menu options.
- Press **MENU SELECT** or **▶** to select an item.
- Press **◀** to return to the main menu or idle screen.

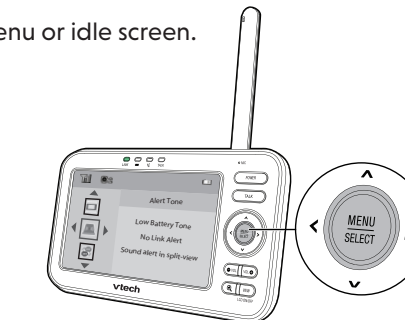


1 INSTALL THE BATTERY

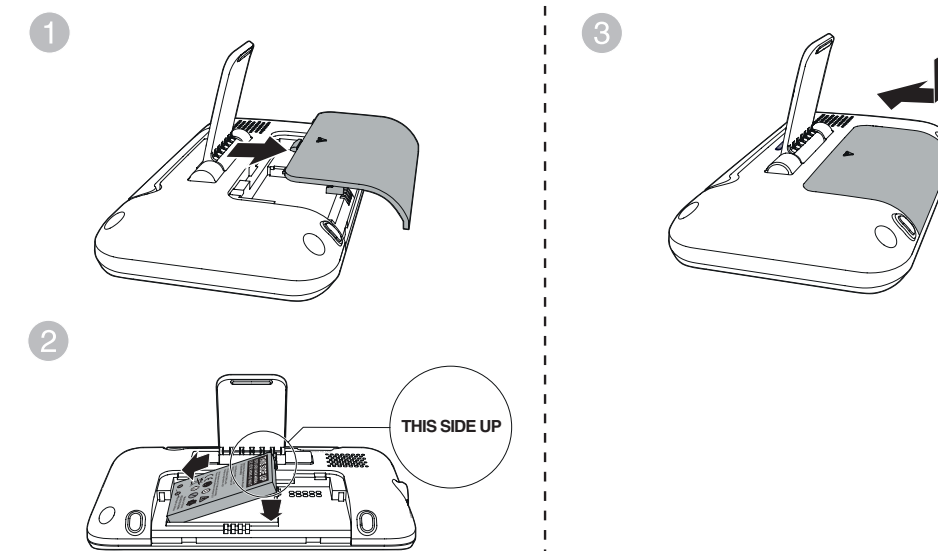

3 POWER ON OR OFF THE BABY MONITOR

Slide the **ON/OFF** switch to power on or off your baby unit.

Press and hold **POWER** to power on or off your parent unit.

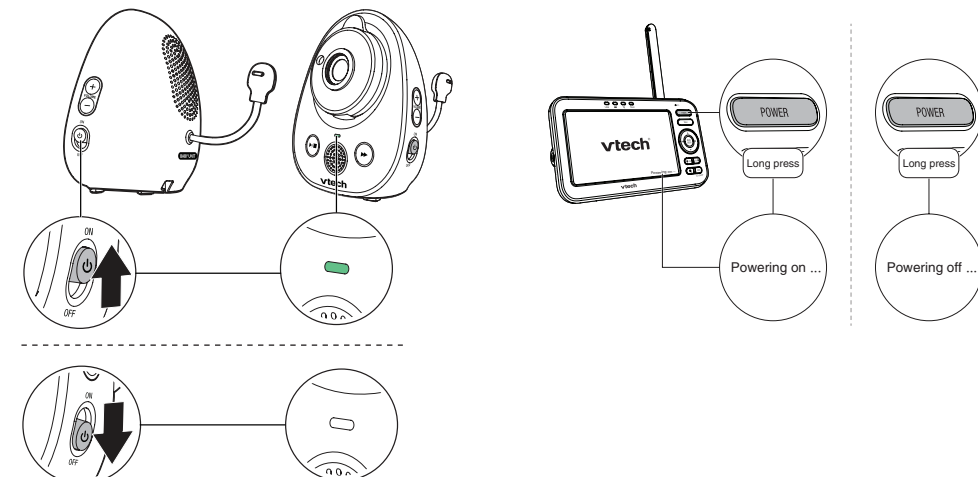

BASIC OPERATION - BABY UNIT


Adjust speaker volume

Press **+ VOLUME -** to adjust your baby unit speaker volume. It determines the lullaby volume and talkback volume transmitted from your parent unit.


Lullaby

Press **▶/■** to play lullaby on the baby unit.


- Press **▶▶** to play the next lullaby.
- Press **▶/■** again to stop the lullaby.

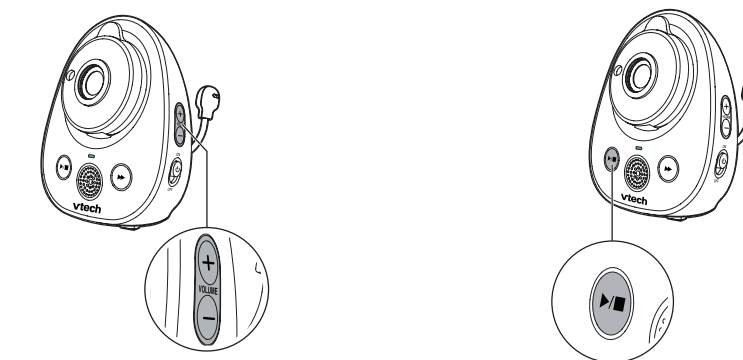

OVERVIEW - PARENT UNIT

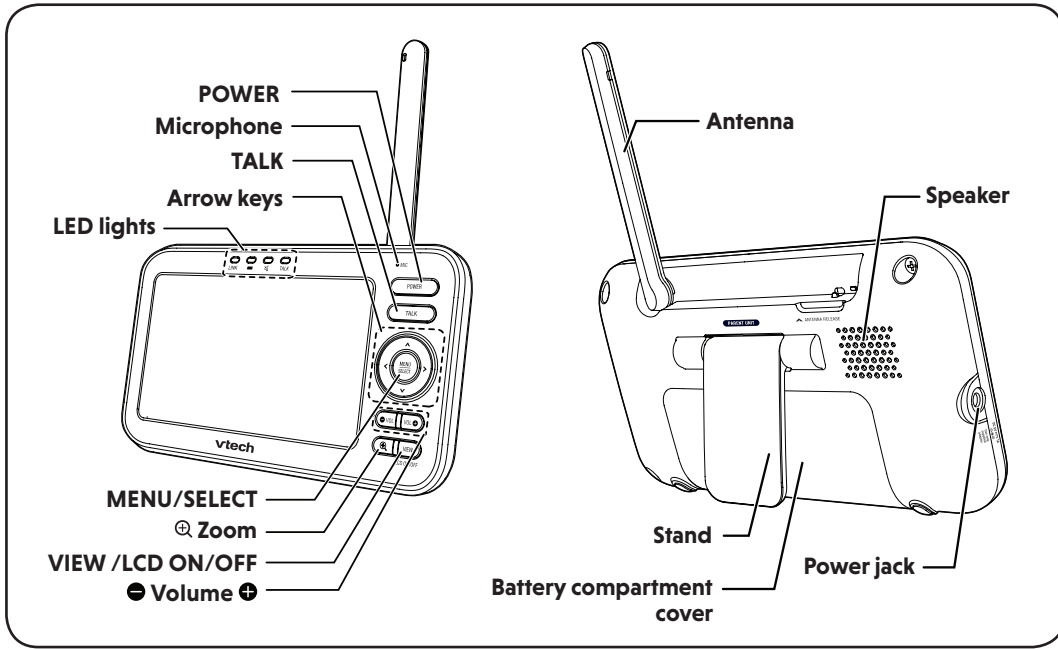

OVERVIEW - BABY UNIT

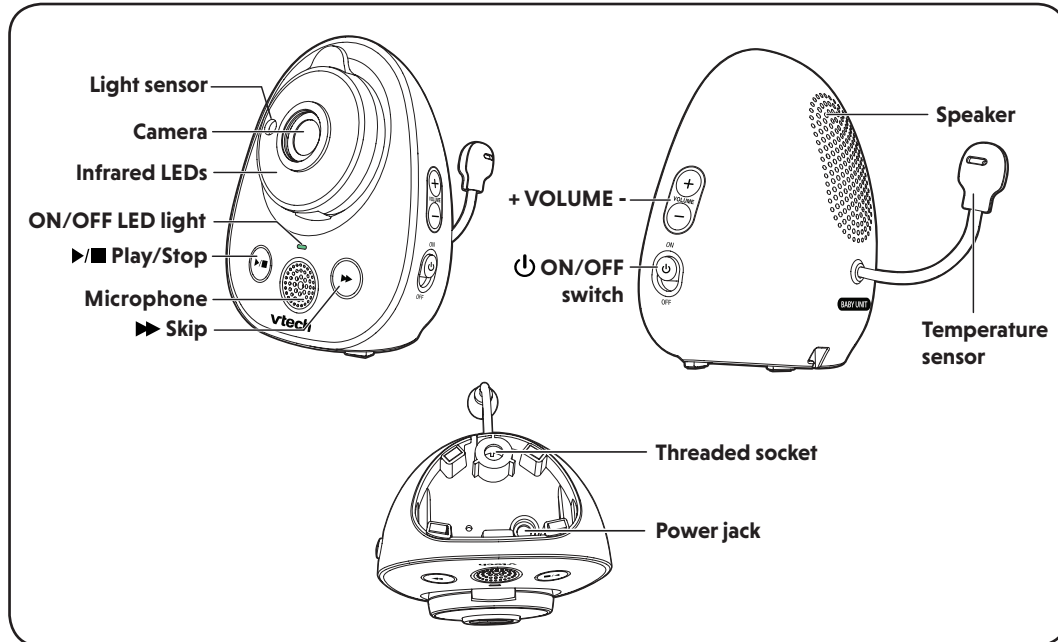

SOUND SENSITIVITY AND SOUND ACTIVATION

Adjust sound detection sensitivity

With sound sensitivity setting, you can choose to hear sounds from the baby unit all the time, or to hear sounds that exceed a certain level.

Parent unit setting	What happens...	You may experience...	What you could do...
Speaker volume: LOW	Hear all sounds all the time, including background sounds.	Difficulty in hearing your baby's soft sounds if the background sounds are louder.	<ul style="list-style-type: none">Increase parent unit's speaker volume, and lower sound sensitivity.If you are using a white noise machine or sound machine, set its volume to low, or relocate it to minimize background sounds.
Sensitivity: Highest [Default]			
Speaker volume: MAX	Only hear sounds that exceed the selected sound sensitivity level.	No sound; or sounds that cut in and out at times as the baby unit may not detect extra soft sounds.	Increase the sound sensitivity, and adjust the volume level if necessary.
Sensitivity: Low / Medium			

For details, please see **Adjust the sound sensitivity of the baby unit** in the User's manual.

Sound activated screen

When sound activation is on, the parent unit screen stays off to save power when the baby unit detects no sound. Once the baby unit detects sounds that are louder than the chosen sound sensitivity level, the parent unit screen turns on automatically. It will then turn off again after 50 seconds of no sound detection.

INSTALL THE LENS (OPTIONAL)

The wide-angle lens (VM101) provided allows you to view more of your baby's room from the parent unit screen. Install the wide-angle lens onto the baby unit camera as shown below.

Remove the lens

1. Remove the lens from the baby unit camera.
2. Insert the wide-angle lens (VM101) onto the baby unit camera.
3. Tighten the lens cap.

NOTES

- When the lens is not in use, cover both sides of the lens with the lens covers provided to avoid scratches.
- You can purchase and install an extra new wide-angle lens (VM101) onto your baby unit if necessary.

FOR VM352-2 ONLY

Status check - Two baby units

If you are viewing baby unit ①, the **ON/OFF** LED light of baby unit ② turns on. As baby unit ② is not being viewed, its **ON/OFF** LED light flashes.

Change different views - Single CAM

In **Single CAM** or **Patrol** mode, press **VIEW** to switch between the image of baby units ① and ②.

Change different views - Patrol

Select **Patrol** as your monitoring mode to alternately view the image from baby units ① and ② every 10 seconds.

Change different views - Split

Select **Split** as your monitoring mode to view the images from both baby units at once.

Mount the baby unit (OPTIONAL)

Place the baby unit on the wall mount bracket. Tighten the screw into the threaded socket at the bottom to secure the baby unit.

You can maximize your baby unit's viewing angles by tilting the wall mount bracket.

Hold the baby unit, and then rotate the knob in anticlockwise direction. This will loosen the joint of the wall mount bracket. Tilt your baby unit up or down to adjust to your preferred angle. Then, rotate the knob in clockwise direction to tighten the joint and secure the angle.

Mount the baby unit (OPTIONAL)

Place the baby unit on the wall mount bracket. Tighten the screw into the threaded socket at the bottom to secure the baby unit.

You can maximize your baby unit's viewing angles by tilting the wall mount bracket.

Hold the baby unit, and then rotate the knob in anticlockwise direction. This will loosen the joint of the wall mount bracket. Tilt your baby unit up or down to adjust to your preferred angle. Then, rotate the knob in clockwise direction to tighten the joint and secure the angle.