RM5887HD 5" Smart Wi-Fi 1080p Over-the-Crib Monitor



Quick start guide

For more support information

Congratulations

on purchasing your new VTech product. Before using this baby monitor, please read the Important safety instructions For support, shopping, and everything new at VTech, visit our website at www.vtechphones.com. In Canada, visit www.vtechcanada.com.

hat does HD Video Monitor do?

VTech 5" Smart Wi-Fi 1080p Video Monitor allows you to stay close to your baby when you are on the move or away. This monitor is Wi-Fi enabled, using your home wireless network to stream live video and audio through the 1080p baby unit and 5-inch color screen parent unit. It allows you to maintain a constant connection to your baby.

You can also monitor from your smartphone or mobile tablet. VTech 5" Smart Wi-Fi 1080p Video Monitor uses MyVTech Baby Pro app to let you

instantly see and hear what's happening with your baby from anywhere in the world. The app can be downloaded from the App Store or the Google Play™ Store.

IMPORTANT SAFETY INSTRUCTIONS

When using your equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

- Follow all warnings and instructions marked on the product.
- Adult setup is required **3. CAUTION:** Do not install the baby unit at a height above 6.5
- 4. This product is intended as an aid. It is not a substitute for responsible and proper adult supervision and should not be used as such.
- . This product is not intended for use as a medical monitor.
- 6. Do not use this product near water, for example, near to a bath, sink, swimming pool or shower. 7. CAUTION: Use only the battery provided. There may be a risk
- of explosion if a wrong type of battery is used for the parent unit. The battery cannot be subjected to high or low extreme temperature and low air pressure at high altitude during use, storage or transportation. Disposal of battery in fire or a hot oven, or mechanically crushing or cutting the battery can result in an explosion. Leaving the battery in an extremely high temperature surrounding environment can result in an explosion or the leakage of flammable liquid of gas. Battery subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas. Dispose of used battery according to the information in **The RBRC seal**.
- . Use only the adapters included with this product. Incorrect adapter polarity or voltage can seriously damage the product.

Power adapter information Baby Unit Output: 5V DC 1.5A VTech Telecommunications Ltd. Model: VT07EUS05150 arent Unit Output: 5V DC 2A Tech Telecommunications Ltd.

Model: VT07EUS05200 Rechargeable battery information: 3.7V 5000mAh, 18.5Wh Lithium-ion battery Zhuhai Great Power Energy Co., Ltd. Model: GSP806090-5Ah-3.7V-1S1P

- 9. The power adapter is intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under the-table or cabinet outlet.
- 10. For pluggable equipment, the socket-outlet (power adapte should be installed near the equipment and should be easily
- Unplug this product from the wall outlet before cleaning.
 Do not use liquid or aerosol cleaners. Use a damp cloth for
- 12. Do not cut off the power adapters to replace them with other plugs, as this causes a hazardous situation. 13. Do not allow anything to rest on the power cords. Do not
- 14. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of

the type of power supply in your home, consult your dealer or

- 15. Do not overload wall outlets or use an extension cord. 16. Do not place this product on an unstable table, shelf, stand or
- other unstable surfaces. 17. This product should not be placed in any area where prope ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a
- idiator or heat source.

The applied nameplate is located at the bottom of the baby unit's base.

19. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the product other than specified access doors may expose you to dangerous voltages or other ris Incorrect reassembling can cause electric shock when the product is subsequently used.

it for some time.

- You should test the sound reception every time you turn on
- he units or move one of the components. 21. Periodically examine all components for damage.
- 22. There is a very low risk of privacy loss when using certain electronic devices, such as baby monitors, cordless nones, etc. To protect your privacy, make sure the product has never been used before purchase, reset the bab monitor periodically by powering off and then powering on the units, and power off the baby monitor if you will not use
- hildren should be supervised to ensure that they do not play with the product. 24. The small parts of this monitor can be swallowed by babies or
- small children. Keep these parts out of reach of children 25. The product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the ppliance by a person responsible for their safety

SAVE THESE INSTRUCTIONS

- Use and store the product at a temperature between 32°F (0°C) and 104°F (40°C).
- Mishandling batteries can cause burn, fire or explosion Batteries should not be exposed to excessive heat such as
- bright sunshine or fire. Do not expose the product to extreme cold, heat or direct
- sunlight. Do not put the product close to a heating source. Warning-Strangulation Hazard-Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3 ft (0.9m) away).
- Do not remove warning label on the adapter cord. Never place the camera unit(s) inside the baby's cot or playpen. Never cover the camera unit(s) or parent unit with ything such as a towel or a blanket.

Other electronic products may cause interference with you

camera unit. Try installing your camera unit as far away from these electronic devices as possible: wireless routers, radios, rellular telephones, intercoms, room monitors, televisions personal computers, kitchen appliances and cordless

Precautions for users of implanted cardiac pacemakers

Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless devices and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:

Pacemaker patients Should keep wireless devices at least six inches from the Should NOT place wireless devices directly over the

pacemaker, such as in a breast pocket, when it is turned ON WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons using wireless devices. Electromagnetic fields (EMF) This VTech product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be

18. Never push objects of any kind into this product through the slots used based on scientific evidence available today. because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the product.

WHAT'S IN THE BOX Your baby monitor package contains the following items. Save your sales receipt and original packaging in the event warranty service is necessary. Parent Unit Extension cable **Baby Unit** Parent Unit adapte (Output: 5V 2A) Baby Unit adapter Mounting template (Output: 5V 1.5A) Quick start quide


For mobile access:

Network

MyVTech Baby Pro mobile app

Wi-Fi router	2.4GHz 802.11 b/g/n
Internet connection	1.5 Mbps @ 720p or 2.5 Mbps @1080p upload bandwidth per baby unit

4. Connect the cable jack with the DC socket, then secure the cable with the Extension

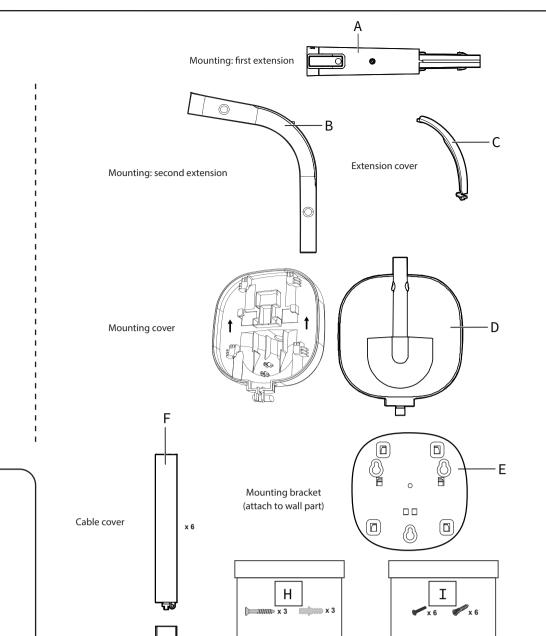

Wall mount screws

and anchors (wall plugs


(inside bag with label)

CONNECT, CHARGE AND POWER ON THE PARENT UNIT

Connect the baby monitor

■ Notes

- The rechargeable battery in the parent unit is built-in.
- Use only the power adapters supplied with this product
- Make sure the parent unit and the baby unit are not connected to the switch controlled electric outlets.
- Connect the power adapters in a vertical or floor mount position only. The adapter prongs are not designed to hold the weight of the parent unit and the baby unit, so do not connect them to any ceiling, under-the-table, or cabinet outlets. Otherwise, the adapter may not properly connect to the outlets.
- Make sure the parent unit, the baby unit and the power adapter cords are out of reach of children.

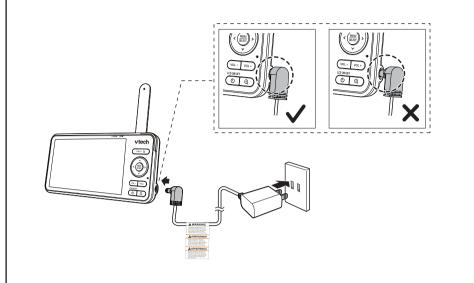

Charge the parent unit battery before use

The parent unit runs on rechargeable battery or AC power. To continuously monitor your baby, keep the parent unit connected to AC power.

- Before using the baby monitor for the first time, charge the parent unit battery for 12 hours. When the parent unit battery is fully charged, the battery icon becomes solid [
- The standby time varies depending on your actual use.

The parent unit turns on automatically after connecting to the power socket, and the welcome screen appears. You can press \circ **Power** to turn the parent unit on or <u>press and hold</u> to turn it off.




The battery icon indicates the battery status (see the following table).

DATTERT INDICATORS	DATTERT STATUS	ACTION
The screen displays !!! and !!!. The !!!! LED light flashes.	The battery has very little charge and may be used for only a short time.	Charge without interru (about 30 minutes).
The battery icon becomes solid	The battery is fully charged.	To keep the battery cha connect it to AC power


Raise the parent unit antenna for better

PARENT UNIT ICONS



Status icons


when in use.





or visit vtechphones.com/recycle For more information, scan the QR code Recycle this product when you are done with it. Product Recycling

IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license. App Store is a trademark of Apple Inc., registered in the U.S. and other countries. Android TM and Google Play TM are trademarks of Google Inc.

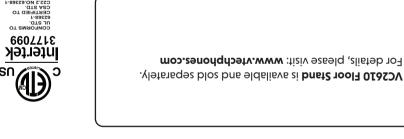

Phone: 1 (800) 595-9511 in the U.S. or 1 (800) 267-7377 in Canada Address: 9020 SW Washington Square Road - Ste 555 Tigard, OR 97223, United States Company: VTech Communications, Inc.

for any loss or claims by third parties that may arise through the use of this product. from the use of this user's manual. VTech Communications, Inc. and its suppliers assume no responsibility VTech Communications, Inc. and its suppliers assume no responsibility for any damage or loss resulting

DISCLAIMER AND LIMITATION OF LIABILITY

Power requirement	Baby unit power adapter: Output: 5V DC, 2.A. Parent unit power adapter: Output: 5V DC, 2A. Parent unit battery: 3.V 5000mAh, 18.5Wh Lithium-ion battery
Aominal effective range	Maximum power allowed by FCC and IC. Actual operating range may vary according to environmental conditions at the time of use.
	(sləxiq 0.57x,0.85.I. 29I)
ГСD	2,, Color LCD
Channels	ττ
	Parent unit: 2412 - 2462 MHz
Transmit frequency	Baby unit: 2412 - 2462 MHz


IECHNICAL SPECIFICATIONS




☆ TIP: There is floor stand available to purchase. /!\ Cautions:


Wall mount should be 1m above the bed sheet level or baby, and 1.7m above the floor. You can use the mounting template (a paper ruler) for















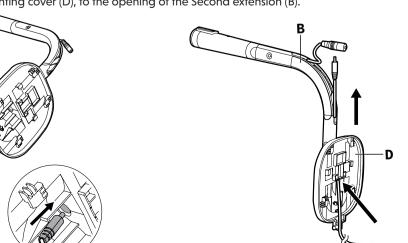














Center of the crib (long side)










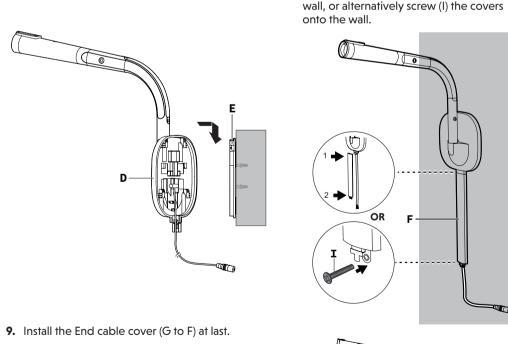


7. Place the Mounting cover (D) on the Mounting

locks into place.

bracket (E), and then slide it downward until it



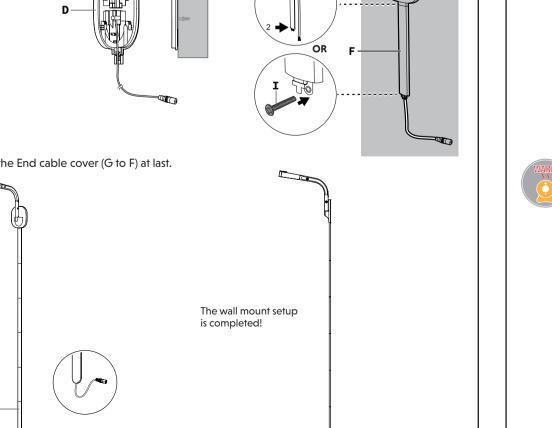

Cable cover screws

8. Install the Cable covers (F) to prevent baby


Utilize the adhesive tape on the back of

the cable cover to stick the covers onto the

from touching the cable.

and anchors (wall plugs)


(inside bag with label)

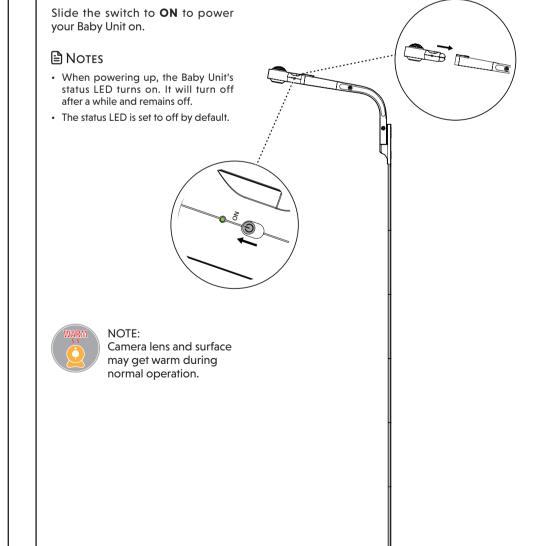


INSTALL AND POWER ON THE BABY UNIT

and the power supply to power up the Baby Unit.

Install the Baby Unit onto the First extension, and connect the adapter to the end of the cable **Options** Night light Baby unit settings **General settings**

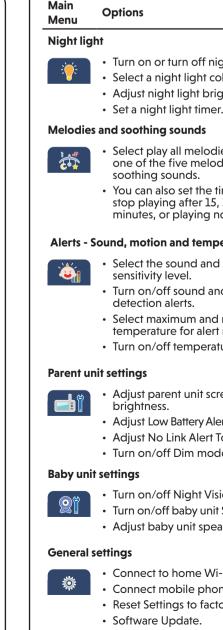

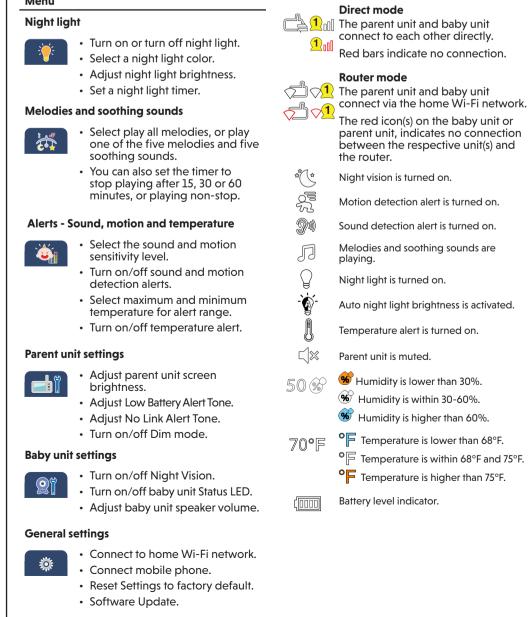

Light sensor Camera lens

Infrared LEDs

· Allow you to see clearly in a dark environment.

LED indicator

- · Steadily on, then off, when the Baby Unit is connected to the Parent Unit
- · Flashes when the Baby Unit is connecting with the Parent Unit, or the link to the Parent Unit has lost.
- **ON/OFF** switch Power it on or off.

Reserve for pairing the Parent Unit.

10 - O- Night light switch

Press to turn the night light on or off.

Power connecto

LED light

- level is detected by the baby unit
- Green, amber and red: high sound level is detected by the baby unit.


4 TALK / ★

 Press and hold to talk to the baby unit. • While in a sub-menu, press to return to the previous menu.

MENU | SELECT

- · Press to enter the main menu.
- While in a menu, press to choose an item, or save a setting.

Parent unit overview



6 < |A| > |V Arrow keys

- Press to navigate left, right, up and down within the main and sub-menus. While viewing a zoomed image, press

⊕ _{Zoom}

- Press to zoom in/out. • While in a sub-menu, press to view the
- help menu.

10 U Power | LCD ON/OFF

11 Antenna

- 13 Power jack
- Force reboot the parent unit.

DOWNLOAD APP FOR MOBILE ACCESS

Download the free **MyVTech Baby Pro** mobile app and install it to a mobile device, then use your mobile device and the mobile app to monitor your baby remotely.

1. Press MENU/SELECT when the parent unit is idle.



- 3. Scan the QR code in the parent unit to download the app into your mobile device if you have not installed the app yet.
- 4. Follow the instructions in the mobile app to set up and pair your baby unit to the mobile app.

Alternatively, you can download the mobile app from the App Store or Google Play store.

Install MyVTech Baby Pro mobile app


- 1. Browse the App Store 🙆 or the Google Play store 💽
- 2. Search for the mobile app with the keyword "myvtech baby pro".
- 3. Download and install the MyVTech Baby Pro mobile app to your mobile device.

Scan the QR codes on the right to get the app.

• Make sure your mobile device meets the minimum requirement for the mobile app.

Minimum requirement The mobile app is compatible with:

Android[™] 6.0 or later; and



In your mobile device:

- 1. Tap 🙋 to run the mobile app in your mobile device, and then create a user account.
- 2. We recommend that you use common webmail services, such as Google Gmail for registration of your user account. Check your email (and Spam folder), and activate your new camera account via the email link, then sign in to your account.
- 3. Follow the instructions in the mobile app to pair the camera. Tap =, then Add Camera in the mobile app to get started.

How the system works

For better security and more stable connectivity, this baby monitor requires connecting to a Wi-Fi network and operating in Router mode connection.

Direct mode

Your baby monitor parent unit and baby unit connect to each other in Direct mode by default, which allows you to immediately stream video out of the box. It is NOT recommended to continue using Direct Mode connection after initial installation.



Router mode

You are required to set up your monitor n **Router mode** to enjoy live video streaming via your parent unit with an enhanced connection. Router mode is the recommended mode for stable connectivity.

Router mode uses your home Wi Fi network to connect your video monitor. It supports live video streaming through the parent unit and smartphone app.

If you want to stream live video remotely with your mobile device,

download and install the MyVTech **Baby Pro** mobile app. With the mobile

app, your Wi-Fi router (not included) provides Internet connectivity to your HD video monitor system. It serves as a communicating channel between your baby unit and mobile device, allowing you to monitor and/or control your baby unit wherever you are. For more details, see **Download app for mobile access** section in this quick start guide.

■ Note

When both parent unit and app are viewing the camera simultaneously. the video quality will be optimised to deliver the best possible viewing result

BASIC OPERATION

After powering up your baby monitor, the parent unit streams live video in direct mode. We recommend you follow the instructions on-screen to set up home Wi-Fi network with your monitor for functionality enhancements and mobile access. See Auto software and firmware update and Download app for mobile access in this Quick Start Guide.

Use the menu

Press **MENU** on the parent unit to enter the main menu, choose a menu item, or save a setting. You can use the parent unit menu for advanced settings or operations, such as to play or stop the baby unit lullaby, or adjust the baby unit sound sensitivity.


While in the menu:

Mobile acces

- menu options.
- Press **SELECT** to select an item.
- Press **TALK** to return to the live video. ullet Press igoplus to go to the **Help & info** page.

Adjust speaker volume Press VOL - | VOL + to adjust the parent unit

speaker volume level received from the baby unit.



Press to zoom in or out in a fixed zoom

sequence. (2) indicates the image is magnified 2 times.



ous devriez tester la réception chaque fois que vous metter

24. Les enfants devraient être supervisés afin de vous assurer qu'ils

les petites pièces de ce moniteur peuvent être avalées par les bébés ou les petits enfants. Veuillez tenir ces pièces hors de portée des enfants.

Le produit n'est pas concu pour être utilisé par des personne: incluant des enfants) aux capacités physiques, sensorielles su mentales réduites ou qui manquent d'expérience et de onnaissances, à moins qu'on leur ait donné suffisamment e supervision ou d'instructions relativement à l'utilisation de

CONSERVEZ CES INSTRUCTIONS


Utilisez et entreposez le produit à une température entre 0° C (32° F) et 40° C (104° F).

N'exposez pas cet appareil à des froids ou des chaleurs extrémes, ainsi qu'à la lumière directe du soleil. Ne l'installez pas près d'une source de chauffage.

ne jouent pas avec l'appareil.

Talk to your baby via the baby unit

- 1. Press and hold the TALK key.
- 2. When the icon displays or screen, speak to your parent unit. Your voice is transmitted to the baby unit.
- 3. When finished talking, release the TALK key to hear your baby




screen without powering off the unit. You will still hear sounds from the baby unit.

- to turn off the screen.
- the screen on again.



To restore to the default settings or reset the Wi-Fi connection, you can reset the parent unit by pressing the **RESET** key at the back of the unit.



PROTECT YOUR PRIVACY AND ONLINE SECURITY

VTech cares about your privacy and peace of mind. That's why we've put together a list of industryrecommended best practices to help keep your wireless connection private and your devices protected when

Ensure your wireless connection is secure. Before installing a device, ensure your router's wireless signal is encrypted by selecting the "WPA2-PSK

with AES" setting in your router's wireless security menu. Change your wireless router's default wireless network name (SSID) to something unique.

online. We recommend you carefully review and consider complying with the following tips.

- Change default passwords to unique, strong passwords. A strong password: - Is at least 10 characters long.

always have the latest security updates.

- Does not contain dictionary words or personal information.
- Contains a mix of uppercase letters, lowercase letters, special characters and numbers. Keep vour devices up to date. Download security patches from manufacturers as soon as they become available. This will ensure you
- If the feature is available, enable automatic updates for future releases.
- Disable Universal Plug and Play (UPnP) on your router.
- UPnP enabled on a router can limit the effectiveness of your firewall by allowing other network devices to open inbound ports without any intervention or approval from you. A virus or other malware program could use this function to compromise security for the entire network
- For more information on wireless connections and protecting your data, please review the following resources from industry experts: Federal Communications Commission: Wireless Connections and Bluetooth Security Tips -
- U.S. Department of Homeland Security: Before You Connect a New Computer to the Internet www.us-cert.gov/ncas/tips/ST15-003.
- Federal Trade Commission: Using IP Cameras Safely https://www.consumer.ftc.gov/articles/0382-using-ip-cameras-safely.


www.fcc.gov/consumers/guides/how-protect-yourself-online.


http://www.wi-fi.org/discover-wi-fi/security.


Wi-Fi Alliance: Discover Wi-Fi Security














Driven by system updates, the software, online help topics, and online FAQs

will be updated periodically For operations and guides to help you using your HD video monitor, and for latest information and supports, go and check the online help topics and online



the notification to trigger the redirection of the online help. If the QR code is not clearly displayed, adjust your camera's focus by moving your device closer or further away until it is clear.

QR code scanner app on your smartphone or tablet. Hold

the device's camera up to the QR code and frame it. Tap

If you would like to contact us, visit https://help.vtechphones.com/cs.

You can also call our Customer Support at 1-844-848-8324 (1-844-84-VTECH) [in US] or 1-888-211-2005 [in



AUTO SOFTWARE AND FIRMWARE UPDATE

To ensure that your HD video monitor is always at its best performance, the Parent Unit will prompt a message and ask you to update its software and the Baby Unit's firmware when there are new versions available. Select "Now" to reboot the system, or switch off and on the Parent Unit later to reboot the system into the latest software.

To check if your device is running on the latest software, or to update your device software, go to:



> Software Update.

> Configure Wi-Fi. ■ Note


Make sure the Baby Unit is on when you set up the Wi-Fi network.

GENERAL PRODUCT CARE

- To keep this product working well and looking good, follow these guidelines:
- Avoid placing it near heating appliances and devices that generate electrical noise (for example,
- DO NOT expose it to direct sunlight or moisture. Avoid dropping the product or treating it roughly.

DO NOT use cleaning spray or liquid cleaners.

DO NOT immerse the parent unit and the baby unit in water and do not clean under running water.



STORAGE

When you are not going to use the video monitor for some time, store the parent unit, the baby unit and the adapters in a cool, dry place.

FREQUENTLY ASKED QUESTIONS

Below are the guestions most frequently asked about the video monito

3. Reboot the parent unit.

Can I turn the parent Yes, press 0 LCD ON/OFF on the parent unit to turn off the screen. The parent unit display screen unit display will also dim automatically after being inactive for some time. In both off but keep hearing instances, you will still be able to hear all sounds from the baby unit. sounds from the baby Press any key to turn the screen back on.

Try the following (in the order listed) for a common cure:

1. Disconnect the power to the baby unit.

Why is the baby unit not responding normally?

Why is my screen in

my baby crying?

The baby unit has a light sensor that measures ambient light. When the ambient light is dim, such as during night time or in a dark room, the baby unit activates its infrared LEDs, and displays the camera images in black and white

2. Wait a few minutes before connecting power back to the baby unit.

Why does my baby unit The baby unit may have lost connection to the Wi-Fi router. Check your show offline? Why is the network and router settings. connection lost every now and then? Why can't I hear a

Other electronic products may cause interference with your baby unit. Try installing your baby unit as far away from these electronic devices as possible. The parent unit speaker volume may be too low. Press VOL + on the parent unit sound/Why can't I hear to increase the volume.

You may have set a low sound sensitivity level. Set the sound sensitivity to a

higher level. For details, go to www.vtechphones.com for online help topics.



VTech's participation makes it easy for you to drop off the spent product at local retailers participating in the program or at authorized VTech product service centers. Please call 1 (800) 8 BATTERY* for information on Li-ion battery recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment and

conserving natural resources The RBRC Seal and 1 (800) 8 BATTERY® are registered trademarks of Call2recycle, Inc.

Increase the separation between the equipment and receive

harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the erference by one or more of the following measures

the user's authority to operate the equipmen

criteria. The baby unit shall be installed and used such that parts of all persons' body are maintained at a distance of approximately 8 in 20 cm) or more. The transmitter and antenna of the parent unit shall be held at least f 1 in (2.5 cm) from your face This Class B digital apparatus complies with Canadian requirement: CAN ICES-3 (B)/NMB-3(B)

This product meets the applicable Innovation, Science and Economic Development Canada technical specifications. RF radiation exposure statemen The product complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The baby unit should be

CALIFORNIA ENERGY COMMISSION BATTERY CHARGING TESTING MODE

Follow the instructions to install and charge the battery. The CEC battery charging testing mode is activated while charging. Even if the parent unit is paired to camera units, the CEC battery charging testing mode is activated while it is powered off and

FOR CETL COMPLIANCE ONLY

- Observez toutes les instructions et mises en garde inscrites sur L'installation par un adulte est requise
- ulement. Il n'est pas le remplacement d'une supervision sponsable et adéquate par un adulte et ne devrait pas être
- ouper mecaniquement la pile peut entrainer une exp e fait de laisser la pile dans un environnement a tempe rremement elevee peut entrainer une explosion ou une te de liquidde ou de gaz inflammable. Une pile soumise a pression d'air extremement beste per la company de la compan
- ue d'endommager sérieusement le produit et mettre votre Informations sur les adaptateurs électriques Sortie: 5 V CC 1,5A.
 VTech Telecommunications Ltd.
 Modèle: VT07EUS05150
 Sortie: 5 V CC 2A.
 VTech Telecommunications Ltd.
 Modèle: VT07EUS05200
 - huhai Great Power Energy Co., Ltd. Modèle: GSP806090-5Ah-3.7V-1S1P Lorsqu'ils sont branchés dans une prise de courant, le adaptateurs secteur ont été conçus pour être orientés correctement, soit à la verticale ou au plancher. Les broches n'ont pas été conques pour supporter le poids du bloc d'alimentation et le maintenir en place si celuici est branché oune prise au plafond, sous une table ou dans un meuble.
 - Pour les appareils raccordés, la prise de courant (de l'adaptateur secteur) doit être installée près de l'équipement et doit être facilement accessible.
 - Ne laissez aucun objet reposer ni appuver sur le cordon d'alimentation. N'installez pas cet appareil dans un endroit où l'on risque d'écraser le cordon d'alimentation ou de le piétiner. Appuyée par l'Administration des aliments et drogues (FDA) des fats-Unis, la firme WTR recommande aux médecins: 14. Ne faites fonctionner cet appareil qu'avec le type d'alimentatior indiqué sur l'étiquette. Si vous ne connaissez pas le type d'alimentation que vous possédez à votre domicile, consultez votre marchand ou votre compagnie locale d'électricité. Avis aux détenteurs de stimulateurs cardiaques
 - 16. Ne surchargez pas les prises de courant murales ni les rallonges
 - Is ne doivent PAS placer le téléphone sans fil directement sur e stimulateur cardiaque, tel que dans une poche de chemise, orsque celui-ci est en marche. L'étude effectuée par l'organisme WRS n'a pas identifié de risque pour les détenteurs de simulateurs cardiaques causés par les gens qui utilisent dispositifs sans fil à proximité de ceux-ci. Champs électromagnétiques (EMF)

ouces du simulateur cardiaque

LIMITED WARRANTY chaleur ou d'un calorifère. De plus, ne placez pas l'appareil dans un endroit avant de vous assurer qu'il y ait une bonne circulation d'air.

What does this limited warranty cover? he manufacturer of this VTech Product warrants to the nolder of a valid proof of purchase ("Consumer" or "you"

that the Product and all accessories provided in the sales package ("Product") are free from defects in material and workmanship, pursuant to the following terms and conditions, when installed and used normally and in accordance with the Product operating instructions. This mited warranty extends only to the Consumer for Produc burchased and used in the United States of America and

What will VTech do if the Product is not free from defect: Examinez les composantes afin de vérifier si celles-ci ne sont pas in materials and workmanship during the limited warranty

period ("Materially Defective Product")? During the limited warranty period. VTech's authorized service epresentative will replace at VTech's option, without charge, Materially Defective Product. If we choose to replace the Product, we may replace it with a new or refurbished oduct of the same or similar design. We will retain defective parts, modules, or equipment. Replacement of the Product, at VTech's option, is your exclusive remedy. VTech will return the replacement Products to you in working ondition. You should expect the replacement to take

How long is the limited warranty period?

This limited warranty does not cover

antenna systems; or

approximately 30 days.

he limited warranty period for the Product extends for ONE YEAR from the date of purchase (90 days on products ourchased as Refurbished*). This limited warranty also applies to the replacement Product for a period of either (a) 90 days from the date the replacement Product is shipped o you or (b) the time remaining on the origin warranty (90-day limited warranty on products that are purchased as Refurbished*); whichever is longer.

*Refurbished products purchased from our online store carry a 90-day replacement warranty. What is not covered by this limited warranty?

shipping or other physical damage, improper installation abnormal operation or handling, neglect, inundation, fire water or other liquid intrusion; or Product that has been damaged due to repair, alteration


Product that has been subjected to misuse, accident.

- or modification by anyone other than an authorized service representative of VTech: or 3. Product to the extent that the problem experienced caused by signal conditions, network reliability, or cable or
- 4. Product to the extent that the problem is caused by use with non-VTech accessories; or . Product whose warranty/quality stickers, product serial number plates or electronic serial numbers have been
- Product purchased, used, serviced, or shipped for repai from outside the United States of America or Canada, or used for commercial or institutional purposes (including but not limited to Products used for rental purposes); Product returned without a valid proof of purchase (see

removed, altered or rendered illegible; or

8. Charges for installation or set up, adjustment of customer controls, and installation or repair of systems outside the

Turn on/off the parent unit screen





Insert a pin into the **RESET** hole on the back of the parent unit, and then gently press the button



How do you get warranty service?

In Canada, go to www.vtechcanada.com or call NOTE: Before calling for service, please review the user's manual - a check of the Product's controls and features may

> save you a service call. Except as provided by applicable law, you assume the risk of loss or damage during transit and transportation and are esponsible for delivery or handling charges incurred in the

VTech assumes no risk for damage or loss of the Product in

What must you return with the Product to get warranty Return the entire original package and contents including the Product to the VTech service location along with a

description of the malfunction or difficulty; and 2. Include a "valid proof of purchase" (sales receipt) identifying the Product purchased (Product model) and


address, and telephone number

oral communications related to this Product. VTech provide no other warranties for this Product. The warranty exclusively describes all of VTech's responsibilities regarding the Produc here are no other express warranties. No one is authorized to make modifications to this limited warranty and you should not rely on any such modification. State/Provincial Law Rights: This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state or province to province.

to one year from the date of purchase. Some states/ provinces do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. In no event shall VTech be liable for any indirect, special incidental, consequential, or similar damages (including but not limited to lost profits or revenue, inability to use the Product or other associated equipment, the cost of substitute equipment, and claims by third parties) resulting from the use of this Product. Some states/provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion

Limitations: Implied warranties, including those of fitness for a particular purpose and merchantability (an unwritter warranty that the Product is fit for ordinary use) are limited


may not apply to you.











to move the viewed image left, right, up and down.


Microphone VOL - | VOL +

Increase or decrease parent unit volume.

iOS 12 or later.

After installing the mobile app, follow the instructions in the mobile app and parent unit to set up and pair your baby unit.

Download on the App Store Google Play



Clean with a soft damp cloth.

NOTE: This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by user or bystander according to the intended usage of the product. This product has been fested and found to comply with the FC

Industry Canada This device contains licence-exempt transmitter(s)/receiver(s) that comply with innovation, Science and Economic Development Canada's

Reorient or relocate the receiving antenna.

installed and operated with a minimum distance of 8 in (20 cm) between the baby unit and all persons' body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. This equipment complies also with Industry Canada RSS-102 with respect to Canada's Health Code 6 for Exposure of Humans to RF Fields.

The term "IC:" before the certification/registration number only signifies that the Industry Canada technical specifications were met.

THE RBRC SEAL

FCC AND IC REGULATIONS

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. WARNING: Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void


licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.


This video monitor meets the California Energy Commission (CEC) regulations for energy consumption. Your video monitor is set up to omply with the energy-conserving standards right out of the box.

a plaque signalétique appliquée est située au bas du socle de unité du bébé. orsque vous utilisez votre appareil, vous devriez toujours suivre ertaines mesures de précaution de base afin de réduire les risques l'incendie, d'électrocution et de blessures corporelles, dont ceux N'enfoncez iamais d'obiets à travers les ouvertures de cet appareil, car ils pourraient entrer en contact avec des points de tension dangereux ou causer des courts-circuits qui peuvent dégénérer en incendies ou en risques d'électrocution. Ne renversez jamais de liquide dans ce produit.

- MISE EN GARDE: N'installez pas l'unité du bébé à une hauteur 4. Ce produit a été conçu pour être un dispositif d'appoint
- 5. Ce produit n'est pas conçu pour être utilisé en tant que moniteur médical. N'utilisez pas cet appareil près de l'eau ni de toute autre source d'humidifé, par exemple, près d'une baignoire, cuve à lessive, évier de cuisine, dans un sous-sol humide ni près d'une piscine, dans un soussol humide ou une douche. Il existe un très faible risque de perte de confidentialité avec certains appareils électroniques (autres écoute-bébés, téléphones sans fils etc.). Pour l'éviter, s'assurer que le produit n'a jamais été utilisé avant l'achat, réinitialiser l'unité de façon périodique, éteindre l'écoute-bébé quand il n'est pas en cours d'utilisation. MISE EN GARDE: N'utilisez que la pile fournie. Il peut y avoir un risque d'explosion si un mauvais type de pile est utilisé pour le dispositif apaisant. La pile ne peut pas être soumise
- ssion d'air extrémement basse peut provoquer une on une fuite de liquide ou de gaz inflammable. au rebut la pile usagée conformément aux informati dans la section **Le sceau RBRC**. N'utilisez que les adaptateurs inclus avec ce produit. L'utilisation d'un adaptateur dont la polarité ou la tension serait inadéquate
 - Avertissement Risque de strangulation -Les enfants se sont ETRANGLES dans des cordons. Gardez ce cordon hors de portée des enfants (à plus de 0,9 m). N'enlevez pas cette étiquette. Informations sur les piles rechargeables 3 7V 5000mAh, 18,5Wh Lithium-ion batterie Ne jamais placer le moniteur à l'intérieur du berceau ou du parc de bébé. Ne jamais couvrir le moniteur ou l'unité (s) portative avec un article tel une serviette ou une couverture.
 - D'autres produits électroniques peuvent causer des interférences auprès de votre caméra IP. Essayez d'installer votre caméra IP le plus loin possible de ces dispositifs électroniques : routeurs sans fil, radios, téléphones cellulaires, interphones, moniteurs de pièces, téléviseurs, ordinateurs personnels, appareils électriques de cuisine et téléphones sans fil. 11. Débranchez ce produit de la prise de courant avant de procéder au nettoyage. N'utilisez pas de nettoyants en aérosols. Utilisez un chiffon humide pour le nettoyer.

 12. Ne coupez pas les cordons d'alimentation pour remplacer les fiches, car ceci peut présenter un danger potentiel. Stimulateurs cardiaques implantés dans l'organisme Les simulateurs cardiaques (ne s'applique qu'aux dispositifs numériques sans fil): l'organisme "Wireless Technology Research, LLC (WTR)", une prime de recherche indépendante, a mené une évaluation pluridisciplinaire des interférences entre les téléphones sans fil portatifs et les stimulateurs cardiaques implantés dans l'organisn
 - Vous devriez maintenir les dispositifs sans fil à au moins six L'équipement doit être fourni à partir d'un acquiescement gauche identifié d'USB aux conditions de la source d'énergie limitée.
- 17. Ne placez pas cet appareil sur un chariot, meuble, trépied, support de montage ni table chancelants. 18. Les trous et ouvertures du boîtier, situés à l'arrière de l'appareil Ce produit de VTech est conforme à toutes les normes se rapportant aux champs électromagnétiques (EMF) standard. Si vous le manipulez correctement en suivant les instructions de ce guide, son utilisation sera sécuritaire pendant de nombreuses années, selon les meilleures évidences scientifiques dont nous disposons aujourd'hui. ou sous celui-ci, servent à aérer l'appareil. Pour l'empêcher de surchauffer, ne bloquez sous aucun prétexte ces ouvertures et n'empêchez pas l'aération adéquate de l'appareil en le plaçant sur un lit, divan, tapis ou toute autre surface similaire. De même, ne le positionnez pas à proximité ni au-dessus d'une source de









To obtain warranty service in the USA, please visit our website at www.vtechphones.com or call 1 (800) 595-9511.

transport of the Product(s) to the service location. VTech will return replaced Product under this limited warranty. ansportation, delivery or handling charges are prepaid

the date of purchase or receipt; and 3. Provide your name, complete and correct mailing

This warranty is the complete and exclusive agreement

Please retain your original sales receipt as proof