


BABY UNIT OVERVIEW

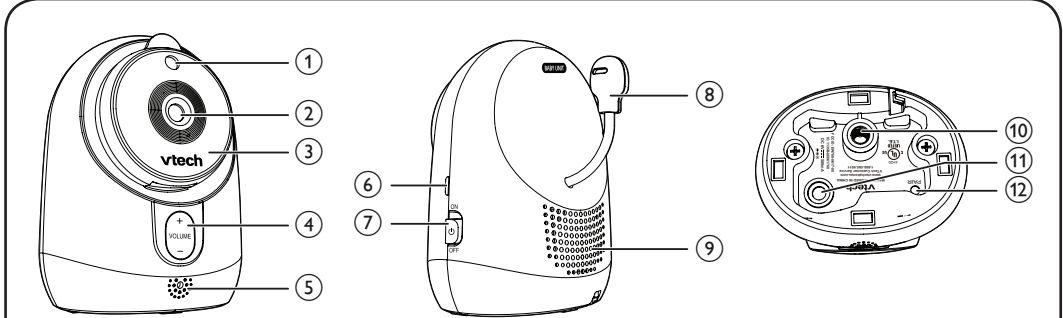


- Light sensor**
- Camera**
- Infrared LEDs**
- +/-VOLUME/+**
 - Press to adjust the speaker volume. It determines the talkback volume transmitted from your parent unit.
- Microphone**
- ON/OFF LED light**
 - On when the baby unit is turned on and is paired to the parent unit.
 - Flashes when the baby unit is not being viewed; or when the link to the parent unit is lost.
- ON/OFF switch**
 - Slide to turn on or off the baby unit.
- Temperature sensor**
- Speaker**
- Wall mount holes**
- Power Jack**
- PAIR**
 - Your baby units and parent unit provided are already paired.
 - Press on the accessory baby units (**VM3211**, purchased separately) to pair to the parent unit.

PARENT UNIT LIGHTS

- | | |
|-------------|---|
| LINK | <ul style="list-style-type: none">On when the parent unit is linked to the baby unit.Flashes when the link to the baby unit being viewed is lost. |
| | <ul style="list-style-type: none">On when the parent unit is connected to AC power, or the battery is charging.Flashes when the parent unit battery is low and needs charging.Off when the parent unit is disconnected from AC power. |
| | <ul style="list-style-type: none">On when the parent unit is talking to the baby unit. |
| TALK | <ul style="list-style-type: none">On when the parent unit is talking to the baby unit. |

PARENT UNIT OVERVIEW

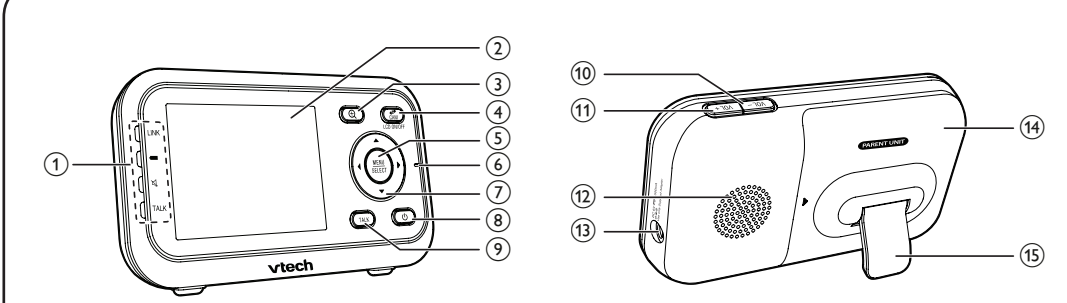

- LED lights**
 - Indicate the different statuses of the parent unit. For details, refer to **Parent unit lights**.
- LCD display**
- Zoom**
 - Press to zoom in or out while viewing image.
- CAM**
 - Press to change the screen to view images from different baby units.
 - For VM3251-2 only
- LCD ON/OFF**
 - Press and hold to turn on or off the LCD screen.
- MENU/SELECT**
 - Press to enter the menu or submenu.
 - While in a sub-menu, press to choose an item, or save a setting.
- Microphone**
 - While in a menu, press to scroll up, or to enter an item's sub-menu.
 - While zooming, press and hold to move the zoomed image upward.
 - While in a menu, press to scroll down.
 - While zooming, press and hold to move the zoomed image downward.
- On/off**
 - While in a menu, press to choose the next item on the left, or enter into the submenu, if any.
 - While zooming, press and hold to move the zoomed image leftward.
 - While in a menu, press to choose the next item on the right, or return to the main menu while in submenu.
 - While zooming, press and hold to move the zoomed image rightward.
- On/off**
 - Press and hold to power on.
 - Press and hold again to power off.
- TALK**
 - Press and hold to talk to the selected baby unit.
- VOL-**
 - Turn down the volume when the speaker is on.
- VOL+**
 - Turn up the volume when the speaker is on.
- Speaker**
- Power jack**
- Battery compartment cover**
- Stand**

PARENT UNIT ICONS

- Status icons**
- Connection status**
 - Full** or **Full** displays when strong signal strength is detected between the baby unit and the parent unit.
 - Tri** or **Tri** displays when moderate or low signal strength is detected between the baby unit and the parent unit.
 - Patrol mode**
 - Displays when the parent unit is in **PATROL** mode.
 - For VM3251-2 only
 - Current view status**
 - Displays the baby unit number of the baby unit that is being viewed.
 - Zoom**
 - Displays when the current image on the parent unit has zoomed in.
 - Night vision**
 - Displays when the baby unit being viewed has activated the night vision feature.
 - Lullaby**
 - Displays when a lullaby is playing.
 - Talkback**
 - Displays when talking back to the baby units from parent unit.
 - 6-level sound indicator**
 - Displays the sound level according to the scales of loudness when there is sound transmitted from the baby unit.
 - II (1 to 2 bars) indicates low sound level detected by the baby unit.
 - IIII (3 to 4 bars) indicates moderate sound level detected by the baby unit.
 - IIIIII (5 to 6 bars) indicates high sound level detected by the baby unit (e.g. baby crying loudly).
 - Mute alert**
 - Displays when the parent unit is talking to the baby unit.
 - Real-time temperature**
 - Displays the real-time temperature detected by the baby unit in Fahrenheit (°F) or Celsius (°C) (e.g. **57°F** or **14°C**).
 - Battery status**
 - animates when the battery is charging.
 - displays solid when the battery is fully charged.
 - displays when the battery is low and needs charging.
 - AC power without battery**
 - Displays when the parent unit is connected to AC power without the battery.
 - Speaker volume**
 - Displays the parent unit speaker volume level while adjusting.

- Main menu icons**
- Brightness**
 - You can change the brightness of the parent unit screen.
 - Pairing baby unit**
 - The baby unit and parent unit provided are already paired. You can add or replace baby units (**VM3211**, purchased separately) to your baby monitor system.
 - LCD screen off timer**
 - You can set a specific time to screen off your parent unit.
 - Temperature**
 - You can choose to set the maximum/minimum temperature and turn on the temperature alert tone so that the parent unit beeps whenever the room temperature detected by the baby unit falls outside of the desired temperature range.
 - You can also choose to display the temperature in Fahrenheit (°F) or Celsius (°C) on your parent unit.
 - Lullaby**
 - You can select, play, or stop a lullaby.

- Warning icons and messages**
- No link to Camera**
 - The selected baby unit is out of range or is turned off.
 - Battery low at Parent Unit**
 - The battery is empty and needs to be recharged.
 - Pairing is completed.**
 - Camera switching, pairing is in progress.**
 - Camera switching, pairing is failed.**
 - Temperature too high**
 - The temperature detected by the baby unit is higher/ lower than the desired temperature alert range.
 - Temperature too low**
 - The baby unit is unpairing from the parent unit.**
 - The parent unit is searching for baby units.**

NIGHT VISION

- The baby unit has infrared LEDs that allow you to see your baby clearly at night or in a dark room. When the baby unit being viewed detects low light levels, the infrared LEDs are switched on automatically. The images from the baby unit are in black and white, and appears on the screen.
- NOTES**
- It is normal if you see a short white glare on your parent unit screen as the baby unit is adapting to the dark environment.
 - When the infrared LEDs are on, the images are in black and white. This is normal.
- TIP**
- Depending on the surroundings and other interfering factors, like lightings, objects, colors and backgrounds, the display resolution may vary. Adjust the baby unit's angle or place the baby unit at a higher level to prevent glare and blurry display.

MOUNT THE BABY UNIT (OPTIONAL)

- Your baby monitor comes ready for tabletop use. You can also choose to mount your baby monitor on the wall. See Mount the baby unit on dry wall (optional) in the **Quick Start Guide** for the wall mounting instructions.

GENERAL PRODUCT CARE

- To keep this product working well and looking good, follow these guidelines:
- Avoid putting it near heating appliances and devices that generate electrical noise (for example, motors or fluorescent lamps).
 - DO NOT expose it to direct sunlight or moisture.
 - Avoid dropping the product or treating it roughly.
 - Clean with a soft cloth.
 - DO NOT immerse the parent unit and the baby unit in water and do not clean them under the tap.
 - DO NOT use cleaning spray or liquid cleaners.
 - Make sure the baby unit and parent unit are dry before you connect them to the mains again.

STORAGE

- When you are not going to use the baby monitor for some time, remove the rechargeable battery from the parent unit. Store the parent unit, the baby unit and the adapters in a cool and dry place.

FREQUENTLY ASKED QUESTIONS

- Below are the questions most frequently asked about the baby monitor. If you cannot find the answer to your question, visit our website at www.vtechphones.com, or contact 1 (800) 595-9511 for customer service.

- | | |
|---|---|
| Why does the baby monitor not respond normally? | Try the following (in the order listed) for common cure: <ul style="list-style-type: none">Disconnect the power to the baby units and the parent unit.Remove the batteries in the parent unit. Then, install the batteries again.Wait a few seconds before connecting power back to the baby units and the parent unit.Turn on the baby units and the parent unit.Wait for the parent unit to synchronize with the baby units. Allow up to one minute for this to take place. |
|---|---|

FREQUENTLY ASKED QUESTIONS (CON'T)

- | | |
|---|--|
| Why don't the power-on light of the baby unit and parent unit go on when I switch on the units? | Perhaps the parent unit is not connected to the power. Insert the appliance plug into the parent unit and put the adapter in a wall socket. Then, press and hold ON/OFF switch to ON to switch on the baby unit and to establish connection with the baby unit. |
| Why doesn't my parent unit charge while connected to AC power? | Make sure the power is not controlled by a wall switch.
Make sure the battery is correctly installed in your parent unit.
You may have used the battery for a long time. Replace a new battery. |
| Why is my screen in black and white? | The screen is in black and white during night-time or in a dark room when the night vision feature is activated. This is normal. |
| Why do I get glare or blurry display on my screen when viewing my baby at night? | During night-time or in a dark room, the surroundings and other interfering factors, like lightings, objects, colors and backgrounds may affect the image quality on your parent unit screen. Adjust the baby unit's angle or place the baby unit at a higher level to prevent glare and blurry display. |
| Why does the baby monitor produce a high-pitched noise? | The parent unit and baby units may be too close to each other. <ul style="list-style-type: none">Move the parent unit away from the baby units until the noise stops; ORTurn down the volume of your parent unit. |
| Why does the parent unit beep? | The baby units may be out of range. Move the parent unit closer to the baby units (but not less than 3 feet). |
| The parent unit may not have enough charge for the parent unit to perform normally. Charge the battery in the parent unit for up to 11 hours. | The parent unit may not have enough charge for the parent unit to perform normally. Charge the battery in the parent unit for up to 11 hours. |
| The temperature of your baby's room may be too high or too low. | The temperature of your baby's room may be too high or too low. |

- The **ON/OFF** light on the baby unit flashes and the parent unit displays **T**.
- I have accidentally unpaired my baby unit.
- When pairing is successful, the parent unit screen displays **Q** and the LINK light turns on. The view of the newly paired baby unit in **SINGLE-CAM** mode will be shown on the parent unit. The **ON/OFF** LED light on the new baby unit remains on.
- If pairing fails, the screen displays **A**. Try the pairing process again.
 - Only one baby unit can be paired at a time.

- Why don't I hear a sound/Why can't I hear my baby cry?
- Why can't I establish a connection? Why is the connection lost every now and then? Why are there sound interruptions?
- The parent unit speaker volume may be too low. Press **VOL+** to increase the volume.
- The baby units may be out of range. Move the parent unit closer to the baby units (but not less than 3 feet).
- Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible.

- If you power on only one baby unit, your parent unit may display **T**, and the **LINK** LED light flashes. Press **VIEW** to switch to the baby unit you have powered on.

IMPORTANT SAFETY INSTRUCTIONS

- When using your equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:
- Follow all warnings and instructions marked on the product.
 - Adult setup is required.
 - This product is not intended for use as a medical monitor.
 - Do not use this product near water. For example, do not use it next to a bath tub, wash bowl, kitchen sink, laundry tub or swimming pool, or in a wet basement or shower.
 - CAUTION:** Use only the batteries indicated in this manual. There may be a risk of explosion if a wrong type of battery is used for the parent unit. Use only the supplied rechargeable battery or replacement battery pack (81207895) for the parent unit. Do not dispose of batteries in a fire. They may explode. Dispose of used battery according to the information in **The RBRC seal**.
 - Use only the adapters included with this product. Incorrect adapter polarity or voltage can seriously damage the product. Baby unit power adapter: Output: 6V DC 500mA; Parent unit power adapter: Output: 6V DC 500mA.
 - The power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.
 - For plugable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible.
 - Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
 - Unplug the power cords before replacing batteries.
 - Do not cut off the power adapters to replace them with other plugs, as this causes a hazardous situation.
 - Do not allow anything to rest on the power cords. Do not install this product where the cords may be walked on or crimped.
 - This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or local power company.
 - Do not overload wall outlets or use an extension cord.
 - Do not place this product on an unstable table, shelf, stand or other unstable surfaces.
 - This product should not be placed in any area where proper ventilation is not provided. Slots and openings in the back or bottom of the product are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat register.
 - Never push objects of any kind into this product through the slots because they may touch dangerous voltage points or short circuit the product.
 - To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the product other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembling can cause electric shock when the product is subsequently used.
 - You should test the sound reception every time you turn on the units or move one of the components.
 - Periodically examine all components for damage.
 - Be aware of possible loss of privacy while using public airwaves. Conversations may be picked up by other nursery monitors, cordless phones, scanners, etc.
 - Children should be supervised to ensure that they do not play with the product.
 - The product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

- CAUTIONS**
- Use and store the product at a temperature between 32°F and 104°F.
 - Do not expose the product to extreme cold, heat or direct sunlight. Do not put the product close to a heating source.
 - Batteries should not be exposed to excessive heat such as bright sunshine or fire.
 - Warning**—Strangulation Hazard—Children have STRANGLed in cords. Keep this cord out of the reach of children (more than 3 ft (0.9m) away). Do not remove this tag.
 - Never place the baby unit(s) inside the baby's crib or playpen. Never cover the baby unit(s) or parent unit with anything such as a towel or a blanket.
 - Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible: wireless routers, radios, cellular telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances and cordless telephones.

- Precautions for users of implanted cardiac pacemakers**
- Cardiac pacemakers (applies only to digital cordless devices):
- Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless devices and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:
- Pacemaker patients**
- Should keep wireless devices at least six inches from the pacemaker.
 - Should NOT place wireless devices directly over the pacemaker, such as in a breast pocket, when it is turned ON.
- WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons using wireless devices.

- Electromagnetic fields (EMF)**
- This VTech product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be used based on scientific evidence available today.

THE RBRC® SEAL

- The RBRC® seal on the Ni-MH battery indicates that VTech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada.
- The RBRC® program provides a convenient alternative to placing used Ni-MH batteries into the trash or municipal waste, which may be illegal in your area.
- VTech's participation in RBRC® makes it easy for you to drop off the spent battery at local retailers participating in the RBRC® program or at authorized VTech product service centers. Please call 1 (800) 8 BATTERY for information on Ni-MH battery recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.
- RBRC® and 1 (800) 8 BATTERY® are registered trademarks of the Rechargeable Battery Recycling Corporation.**

FCC AND IC REGULATIONS

- FCC Part 15**
- This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- WARNING:** Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander according to the intended usage of the product. This product has been tested and found to comply with the FCC criteria. Caution: This Transmitter must be installed to provide a separation distance of at least 20cm from all persons. The transmitter and antenna of the parent unit shall be held at least 1.5 cm (2.5 cm) from your face.
- This Class B digital apparatus complies with Canadian requirement: CAN ICES-3 (B)/NMB-3(B)

- Industry Canada**
- This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference, including interference that may cause undesired operation.
- The term "IC": before the certification/registration number only signifies that the Industry Canada technical specifications were met.
- This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

- FCC RF radiation exposure statement**
- The baby unit complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The baby unit should be installed and operated with a minimum distance of 8 in (20 cm) between the baby unit and all persons' body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment complies also with Industry Canada RSS-102 with respect to Canada's Health Code 6 for Exposure of Humans to RF Fields.

CALIFORNIA ENERGY COMMISSION BATTERY CHARGING TESTING MODE

- This baby monitor meets the California Energy Commission (CEC) regulations for energy consumption. Your baby monitor is set up to comply with the energy-conserving standards right out of the box. Follow the instructions to install and charge the battery. The CEC battery charging testing mode is activated while charging. Even if the parent unit is paired to baby units, the CEC Battery charging testing mode is activated while it is powered off and charging.

- Mesures de sécurité importantes**
- Lorsque vous utilisez votre appareil, vous devriez toujours suivre certaines mesures de précaution de base afin de réduire les risques d'incendie, d'électrocution et de blessures corporelles, dont ceux qui suivent :
- Observez toutes les instructions et mises en garde inscrites sur l'appareil.
 - L'installation par un adulte est requise.
 - Ce produit a été conçu pour être un dispositif d'appoint seulement. Il n'est pas le remplacement d'une supervision responsable et adéquate par un adulte et ne devrait pas être utilisé comme telle.
 - Ce produit n'est pas conçu pour être utilisé en tant que moniteur médical.
 - N'utilisez pas cet appareil près de l'eau ni de toute autre source d'humidité, par exemple, près d'une baignoire, cuve à lessive, évier de cuisine, dans un sous-sol humide ni près d'une piscine, dans un sous-sol humide ou une douche.
 - MISE EN GARDE:** Utilisez uniquement les piles fournies. Il existe un risque d'explosion si un autre type de batterie est utilisé pour l'unité Parents. N'utilisez que le bloc-piles rechargeable inclus ou le bloc-piles de rechange (81207895). N'incinerez pas les piles. Celles-ci risqueraient d'exploser. Jetez les piles usées selon les renseignements suivant le **SCAU du RBRC**.
 - N'utilisez que les adaptateurs inclus avec ce produit. L'utilisation d'un adaptateur dont la polarité ou la tension serait inadéquate risque d'endommager sérieusement le produit et mettre votre sécurité en péril. Adaptateur de l'unité du bébé: Sortie: 6V CC 500mA. Adaptateur de l'unité du parent: Sortie: 6V CC 500mA.
 - Lorsqu'ils sont branchés dans une prise de courant, les adaptateurs secteur ont été conçus pour être orientés correctement, soit à la verticale ou au plancher. Les broches n'ont pas été conçues pour supporter le poids du bloc d'alimentation et le maintenir en place si celui-ci est branché dans une prise au plafond, sous une table ou dans un meuble.
 - Pour les **PRODUITS À BRANCHER À UNE PRISE DE COURANT**, la prise de courant doit être installée près du produit, afin d'assurer une accessibilité sécuritaire à la prise de courant.
 - Débranchez ce produit de la prise de courant avant de procéder au nettoyage. N'utilisez pas de nettoyeurs en aérosols. Utilisez un chiffon humide pour le nettoyer.
 - Débranchez les cordons d'alimentation avant de remplacer le bloc-piles.
 - Ne coupez pas les cordons d'alimentation pour remplacer les fiches, car ceci peut présenter un danger potentiel.
 - N'exposez aucun objet près de l'appareil, mais apportez-le dans un centre de service autorisé. N'incinerez pas les piles. Celles-ci risqueraient d'exploser. Jetez les piles usées selon les renseignements suivant le **SCAU du RBRC**.
 - Ne faites fonctionner cet appareil qu'avec le type d'alimentation indiqué sur l'étiquette. Si vous ne connaissez pas le type d'alimentation que vous possédez à votre domicile, consultez votre marchand ou votre compagnie locale d'électricité.
 - Ne surchargez pas les prises de courant murales ni les rallonges électriques.
 - Ne placez pas cet appareil sur un chariot, meuble, trépied, support de montage ni table chancelants.
 - Les trous et ouvertures du boîtier, situés à l'arrière de l'appareil ou sous celui-ci, servent à aérer l'appareil. Pour l'empêcher de surchauffer, ne bloquez sous aucun prétexte ces ouvertures et n'empêchez pas le refroidissement de l'appareil en le plaçant sur un lit, divan, tapis ou toute autre surface similaire. De même, ne le positionnez pas à proximité ni au-dessus d'une source de chaleur ou d'un calorifère. De plus, ne placez pas l'appareil dans un endroit avant de vous assurer qu'il y ait une bonne circulation d'air.
 - N'enfoncez jamais d'objets à travers les ouvertures de cet appareil, car ils pourraient entrer en contact avec des points de tension dangereux ou causer des courts-circuits qui peuvent déclencher des incendies ou en risques d'électrocution. Ne renversez jamais de liquide dans ce produit.
 - Afin de réduire les risques d'électrocution, ne démontez pas cet appareil, mais apportez-le dans un centre de service autorisé. L'ouverture du boîtier ou le retrait de toutes pièces que contient cet appareil, à l'exception de l'accès autorisé à certaines portes ou ouvertures, risque de vous exposer à des points de tension dangereux ou d'autres dangers. Un remontage incorrect peut par la suite présenter des risques d'électrocution.
 - Vous devriez tester la réception chaque fois que vous mettez l'appareil en fonction.
 - Examinez les composantes afin de vérifier si celles-ci ne sont pas endommagées.
 - Soyez vigilant de la perte de la confidentialité lorsque vous utilisez les ondes publiques. Les conversations peuvent être entendues par d'autres personnes.
 - Les enfants devraient être supervisés afin de vous assurer qu'ils ne jouent pas avec l'appareil.
 - Le produit n'est pas conçu pour être utilisé par des personnes (incluant des enfants) aux capacités physiques, sensorielles ou mentales réduites ou qui manquent d'expérience et de connaissances, à moins qu'on leur ait donné suffisamment de supervision ou d'instructions relativement à l'utilisation de l'appareil par une personne responsable de leur sécurité.

- CONSERVEZ CES INSTRUCTIONS**
- Mises en garde**
- Utilisez et entreposez le produit à une température entre 0 ° C (32 ° F) et 40 ° C (104 ° F).
 - N'exposez pas cet appareil à des températures extrêmes, ainsi qu'à la lumière directe du soleil. Ne l'installez pas près d'une source de chauffage.
 - Le bloc-piles ne doit pas être exposé à la chaleur excessive telle que la lumière du soleil ou au feu.
 - Assurez-vous que les enfants ne touchent pas le cordon de décharge ou les boutons de sortie des enfants, au moins 1 mètre (3 pieds) de l'enfant ou du bureau, pour éviter tout risque de strangulation.
 - Ne jamais placer le moniteur à l'intérieur du bureau ou du parc de bébé. Ne jamais couvrir le moniteur ou l'unité (s) portable avec un article tel qu'une couverture.
 - D'autres équipements électroniques peuvent produire des interférences sur votre moniteur vidéo et audio. Tentez d'installer le moniteur vidéo et audio à l'écart des appareils électroniques tels que des radios sans fils, radios, téléphones cellulaires, interphones, moniteurs, téléphones, ordinateurs personnels, électromagnétiques et téléphones sans fil.

- Stimulateurs cardiaques implantés dans l'organisme**
- Les stimulateurs cardiaques (ne s'applique qu'aux dispositifs numériques sans fil) :
- L'organisme "Wireless Technology Research, LLC (WTR)", une firme de recherche indépendante, a mené une évaluation pluridisciplinaire des interférences entre les produits Vtech et les stimulateurs cardiaques implantés dans l'organisme. Appuyée par l'Administration des aliments et drogues (FDA) des États-Unis, la firme WTR recommande aux médecins:
- Avis aux détenteurs de stimulateurs cardiaques**
- Vous devriez maintenir les dispositifs sans fil à au moins six pouces du stimulateur cardiaque.
 - Ils ne doivent PAS placer le téléphone sans fil directement sur le stimulateur cardiaque, tel que dans une poche de chemise, lorsque celui-ci est en marche.
- L'étude effectuée par l'organisme WTR n'a pas identifié de risque pour les détenteurs de stimulateurs cardiaques causés par les gens qui utilisent des dispositifs sans fil à proximité de ceux-ci.
- Champs électromagnétiques (EMF)**
- Ce produit de Vtech est conforme à toutes les normes se rapportant aux champs électromagnétiques (EMF) standard. Si vous le manipulez correctement en suivant les instructions de ce guide, son utilisation sera sécuritaire pendant de nombreuses années, selon les meilleures évidences scientifiques dont nous disposons aujourd'hui.