VM924, VM924-2 VM924-3, VM924-4

Pan and Tilt Video Baby Monitor



Crystal controlled PLL synthesizer

Nominal effective range Maximum power allowed by FCC and IC. Actual operating range

Parent unit: 3.6V, 2600mAh, 9.36Wh Li-ion battery

Baby unit power adapter: Output: 5V DC @ 1A

Parent unit power adapter: Output: 5V DC @ 1A

may vary according to environmental conditions at the time of use.

Baby unit: 2405 - 2475 MHz

Parent unit: 2405 - 2475 MH

(WQVGA 480x272 pixel)

5" Color LCD

Recycle this product when you are done with it.

For more information, scan the QR code

or visit www.vtechbabycare.com.



Frequency control

Transmit frequency

Power requirements

Product Recycling

Channels

LCD

TECHNICAL SPECIFICATIONS

For more support information



Power adapter information: Dutput: 5V DC 1A Model: VT05EUS05100

accessible.

used as such.

bath, sink, swimming pool or shower.

CAUTION: Use only the internal, non-user replaceable bat-tery fitted to the parent unit. There may be a risk of explosion

if a wrong type of battery is used for the parent unit. The bat

and low air pressure at high altitude during use, storage or

transportation. Disposal of batteries in fire or a hot oven, mechanically crushing or cutting the battery can result in an explosion. Subjecting products or batteries to an extremely

eakage of flammable liquids, or gas. Products or batteries

subjected to extremely low air pressures may result in explo-

sion or leakage of flammable liquids, or gas. Dispose of usec batteries according to the information in **The RBRC seal**.

rrect power adapter polarity or voltage can seriously age the product.

Use only the power adapters supplied with this product.

high temperature environment can result in explosion or

Jiangxi Jian Aohai Technology Co.,Ltd Model: A318-050100W-US2

Rechargeable battery information: Model: ICR18650-2.6Ah-3.6V-1S1P 9. The power adapter is intended to be correctly oriented in a

- vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, un-10. For pluggable equipment, the socket-outlet (power adapter hould be installed near the equipment and should be easily
- 11. Unplug this product from the wall outlet before clea Do not use liquid or aerosol cleaners. Use a damp cloth for 12. Do not modify the power adapters or replace with other
- Do not allow anything to rest on the power cords. Do not install this product where the cords may be walked on or damaged. 14. The product should only be operated from a power source
- indicated on the power adapter label or marking. If you are unsure of the type of power supply in your home, consult your dealer or electricity supply provider. 15. Do not overload wall outlets or use an extension cord.
- 16. Do not place this product on an unstable table, shelf, stand or
- 17. This product should not be placed in any area where proper ventilation is not provided. Any slots or openings in the back or bottom of this product are provided for ventilation. To protect from overheating, openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a ator or heat source.
- 18. Never insert any objects through any apertures or slots in the

IMPORTANT SAFETY INSTRUCTIONS

battery or other internal parts. Never spill any liquids on the When in use, basic safety precautions should always be followed 19. To reduce the risk of electric shock, do not disassemble this reduce the risk of fire, electric shock and injury, including the

- product, but take it to an authorized service facility. Disas-sembling or removing parts of the product other than battery 1. Follow all warnings and instructions marked on the product. Adult setup is required.
 CAUTION: Do not install the baby unit at a height above 6.5 eplacement via a battery door (if applicable) may expose
 - 20. You should test the sound reception every time you turn on the units or move one of the components.
- 4. This product is intended as an aid. It is not a substitute for . Periodically examine all components for damage. . There is a very low risk of privacy loss when using certain electronic devices, such as baby monitors, cordless tele-5. This product is not intended for use as a medical monitor 5. Do not use this product near water, for example, near to a
 - phones, etc. To protect your privacy, make sure the product has never been used before purchase, reset the baby monitor periodically by powering off and then powering on the units, and power off the baby monitor if you are not intending to use it for some time.
 - . Children should be supervised to ensure that they do no 24. The small parts of this monitor can be swallowed by babies or

small children. Keep these parts out of reach of children. The product is not intended for use by persons (including children) with reduced physical, sensory or mental capabili

ties, or lack of experience and knowledge, unless they have

SAVE THESE INSTRUCTIONS

- been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Use and store the product at a temperature between 32°F (0°C) and 104°F (40°C). Mishandling batteries can cause burn, fire or explosion
- Batteries should not be exposed to excessive heat such as bright sunshine or fire.
- Do not expose the product to extreme cold, heat or direct sunlight. Do not place the product close to a heating source
- Warning—Strangulation Hazard—Children have STRANGLED in cords. Keep this cord out of the reach of children nore than 3 ft (0.9m) away). Do not remove warning label on the adapter cord. Never place the baby unit(s) inside the baby's crib or playpen. Never cover the baby unit(s) or parent unit with anything
- Other electronic products can cause interference to your parent unit and baby unit. Try installing your baby unit as far away as possible from the following electronic devices: wireless routers, radios, mobile telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances (e.g. microwave ovens) and cordless telephones.

such as a towel or a blanket.


Precautions for users of implanted cardiac pacemakers Cardiac pacemakers (applies only to digital cordless devices Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless devices and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:

Pacemaker patients
- Should keep wireless devices at least six inches from the

should NOT place wireless devices directly over the pacemaker, such as in a breast pocket, when it is turned ON. WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons using wireless devices. Electromagnetic fields (EMF)

This VTech product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be used based on scientific evidence available today

WHAT'S IN THE BOX

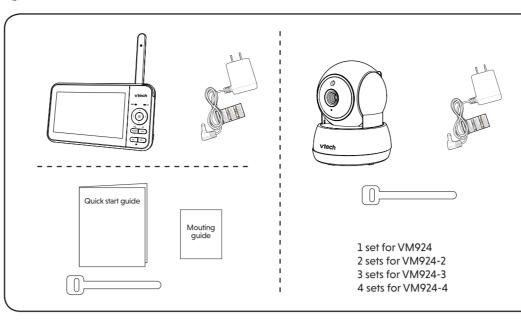


CONNECT THE BABY MONITOR

■NOTES

The rechargeable battery in the parent unit is built-in. Use only the power adapters supplied with this product

OVERVIEW - BABY UNIT

- Make sure the parent unit and the baby unit are not connected to an electronically controlled electric
- Connect the power adapters in a vertical or floor mount position only. The adapters' prongs are not designed to hold the weight of baby monitor, so do not connect them to any ceiling, under-the-table, or cabinet outlets. Otherwise, the adapters may not properly connect to the outlets.
- Make sure the parent unit, the baby units and the power adapter cords are out of reach of children.

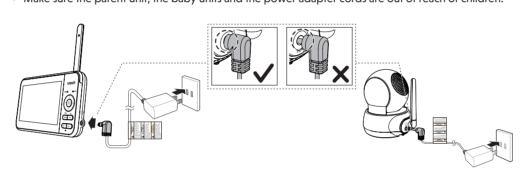

The parent unit and baby unit(s)

回被回

provided are already paired.

CONNECT THE BABY MONITOR (CONT'D)


Charge the parent unit battery

When you have connected and turned on the parent unit, the battery will be charged automatically.

- Before using the baby monitor for the first time, charge the parent unit battery for 12 hours. When the parent unit battery is fully charged, the battery icon segment are solid (iii).
- It takes longer to charge the battery when the parent unit is turned on. To shorten the charging time, turn the parent unit off while charging.
- The standby time varies depending on the sensitivity level you set, your actual use and the age of the battery.


BATTERY INDICATORS BATTERY STATUS ACTION The screen displays The battery has very little power and can only be used for a short time. The battery icon segments The battery is fully charged. To keep the battery charged, connect the unit to AC power when in use.	The battery icon indicates the battery status (see the following table).						
The light flashes. power and can only be used for a short time. The battery icon segments power and can only be used for a short time. The battery icon segments power and can only be used for a short time. The battery icon segments power and can only be used for a short time.	Battery indicators	BATTERY STATUS	Action				
		power and can only be used					
ure some (mass).	The battery icon segments are solid (iii).	The battery is fully charged.	To keep the battery charged, connect the unit to AC power when in use.				

POWER ON OR OFF THE BABY MONITOR

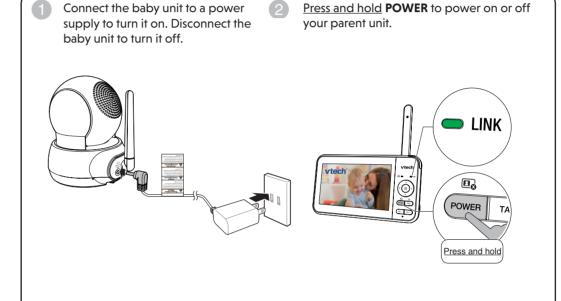

POSITIONING THE BABY MONITOR



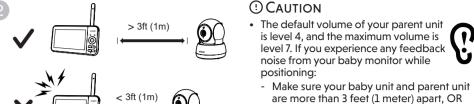





place your baby monitor at least 3 feet (1 meter) away from devices such as wireless routers, microwave ovens, mobile phones and computers.

Turn down the volume of your parent unit.



Once you power on both your baby unit and parent unit, your parent unit displays image from the baby unit, and the **LINK** LED light turns on.

The baby unit's power LED light turns on.



Basic Operation - Parent unit


Press = to enter the menu, choose a menu item, or save a setting. You can use the parent unit for advanced settings or operations, such as to play or stop the baby unit lullaby, or to adjust the baby unit sound sensitivity.

While in the menu:

- Press = to select an item, or to save a setting.
- Press ∧ or ∨ to scroll among the sub-menus, or to adjust a setting.
- without changing the current setting.
- Press TALK to return to live video.


Talk to your baby unit

<u>Press and hold</u> **TALK** and speak to your parent unit. Your voice is transmitted to talking to hear your baby again.



Turn off the screen Press Power to turn off the parent unit

screen without powering off the parent unit. the baby unit. Release **TALK** when finished You will still hear sounds from the baby unit.

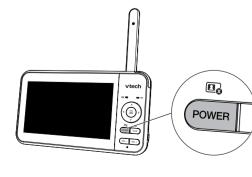

2025 VTech Communications, Inc. All rights reserved


05/25. VM924-X_US_QSG_V3

兴 TIP

• Press any key on the parent unit to turn the screen on again.

Adjust parent unit volume

Press VOL - / VOL + to adjust your parent unit speaker volume.




Pan and tilt the baby unit

Press Arrow keys $\langle , \wedge , \vee \text{ or } \rangle$ to pan and tilt the baby unit.



🔲 Overview - Parent unit

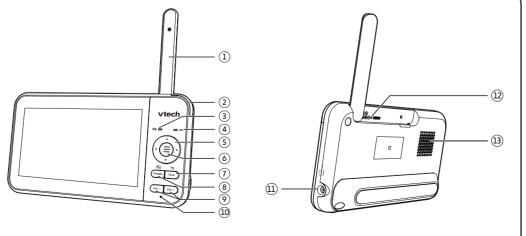

- Antenna 5 Arrow keys <∧∨>
- 3-level sound indicator
- Battery LED light

4 LINK LED light

- **MENU /SELECT**
 - TRETURN/TALK
- 9 **VOL / VOL +** 10 Microphone
 - 11 Power jack 12 RESET
 - LCD off/POWER key 13 Speaker
- https://help.vtechphones.com/vm924-3 or https://help.vtechphones.com/vm924-4 Scan the QR code on the right. Launch the camera app or QR code scanner app on your smartphone or tablet. Hold the device's camera

Light sensor

Infrared LEDs

Speaker

NEED HELP?

Power LED ligh

to the online help page. - If the QR code is not clearly displayed, adjust your camera's focus by moving your device closer or further away until the

and support, check out our online help topics and online FAQs.

Go to https://help.vtechphones.com/vm924,

https://help.vtechphones.com/vm924-2,

Use your smartphone or mobile device to access our online help.

If you would like to contact us, visit https://help.vtechphones.com/cs.

up to the QR code and frame it. Tap the notification to be redirected

For operations and guides to help you use your video monitor, and for the latest information

You can also call our Customer Support at 1 (800) 595-9511 [in US] or 1 (800) 267-7377 [in Canada] for help.

PARENT UNIT ICONS

Main menu icons Main Sub-menu menu **Brightness**



≋1 ≋2 ≋3 ≋4



11 **1**12 **1**13 **1**14 **1**15



• Set timer to stop playing the selected melody or soothing sound, or set OFF to play non-stop.

· Adjust the parent unit LCD brightness.

• Select one of the soothing sounds, or



Select one of the five melodies.




Screen off Timer

Sub-menu

OFF 5min 30min 60min

Screen off Timer · The parent unit screen will turn off after the selected time to save energy. You can





screen will automatically turn on when detected sounds exceed a set level. You can adjust the baby unit microphone sensitivity level so that the higher the sensitivity level, the more sensitive the baby unit is in detecting sounds for transmitting to the parent unit. For details, see the Sound sen activation section.


 The parent unit will then turn off again after 50 seconds if the sound detected is lower than the set level.


Note Not Note Not Note Note Note Note Note Note Note

• When the parent unit screen is off, if alerts are received, for example, no signal Monitoring Mode (For pairing with VM924-2, VM924-3, VM924-4) received between the parent unit and baby unit, or a low battery, the parent unit screen will turn on.


Set the parent unit to beep when the







VM924-3, VM924-4).



 Set the parent unit to beep when the baby unit detects sounds while in Split mode (For pairing with VM924-2,

Main Sub-menu **Temperature**

ON/OFF • Turn on/off temperature alert tone. · Set the parent unit to beep whenever

the room temperature detected by

the baby unit falls outside of the set temperature range. Set the minimum temperature.

• Set the maximum temperature. • Set temperature display in Fahrenheit (°F) or Celsius (°C).

Baby Unit Settings




Baby unit speaker volume Adjust the baby unit speaker volume.



2 1 **2** 2 • Single CAM mode The



Split mode



same time in split view.



 Patrol mode every 10 seconds.




The screen displays images only from the selected baby unit in full screen.



The screen displays a single cam view that transitions to a different baby unit



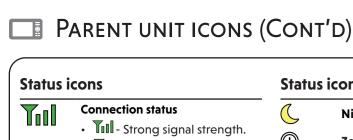

• TII - Moderate signal

• Tow signal strength. T - Weak signal strength.

Split mode (For pairing with VM924-2, VM924-3, VM924-4)

Patrol mode (For pairing with VM924-2. VM924-3, VM924-4)

Current view status

• The baby unit number that is

being viewed when in: Single CAM mode.

- Patrol mode (For pairing with VM924-2, VM924-3, VM924-4)

Split mode (For pairing with VM924-2, VM924-3, VM924-4)

Status icons

Night vision - On

Zoom - On Lullaby - On

°F or °C Real-time temperature Real-time temperature detected by the baby unit in Fahrenheit (°F) or Celsius (°C) (e.g. **57°F** or **14°C**).

> Temperature alert tone - On Talkback - On

Mute aleri · Displays when the parent unit


speaker volume is set to off Displays when the parent unit is talking to the baby unit.


Battery status


animates when the battery is charging.

• Time - battery is fully charged. • 🔲 - battery is low and needs

TABLE MANAGEMENT








Adjust sound sensitivity level of the baby unit

The parent unit screen will turn on only when the detected sounds exceed a set level

Use the parent unit to adjust the microphone sensitivity of your baby unit. The higher the sensitivity level, the more sensitive the baby unit s in detecting sounds that transmit to the parent unit. The sound sensitivity level is preset to the highest level.




	Level 5 (Highest)	Level 4 (High)	Level 3 (Medium)	Level 2 (Low)	Level 1 (Lowest)			
ESCRIPTION	The parent unit screen turns on for quiet sounds, (including background noises) from your baby's room.	The parent unit screen turns on for soft babbling and louder sounds from your baby. It remains off when your baby sleeps soundly.	The parent unit screen turns on for loud babbling and louder sounds from your baby. It remains off when your baby makes soft sounds.	The parent unit screen turns on for crying and louder sounds from your baby. It remains off when your baby makes soft sounds.	The parent unit screen turns on for loud crying or screeching sounds from your baby. It remains off when your baby makes soft sounds.			


SOUND SENSITIVITY AND SOUND ACTIVATION

When **AUTO** is selected, the parent unit screen stays off to save power when the baby unit detects sounds that are lower than the set sensitivity level.

Once the baby unit detects sounds that are louder than the set sensitivity level, the parent unit screen turns on automatically. It will then turn off again after 50 seconds if the sounds detected are lower than the set sensitivity level.

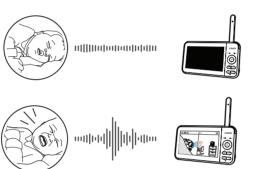

Dim mode helps you save parent unit power. When your parent unit is not charging, the display will automatically dim after 10 minutes of inactivity if no keys are pressed or alerts are received from the baby unit.

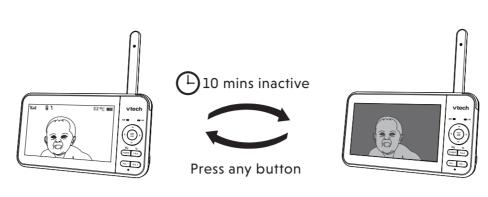

NIGHT VISION

DIM MODE



The baby unit has infrared LEDs that allow you to see your baby clearly at night or in a dark room. When the baby unit detects low light levels, the infrared LEDs are switched on automatically. The images from the baby unit are in black and white, and appears on the screen.

A click sound from the baby unit is normal and

occurs when your unit adapts to the environment


To achieve accurate and high quality video, you baby unit is equipped with an Infrared cut-of filter lens that optimizes color accuracy in bright day-time environments. When the environment turns dark at night, this filter lens is withdrawn o enhance night vision quality. The brief click sound you hear is from the filter lens activating deactivating as the unit switches from day to night vision (and vice versa).

Depending on the surroundings and other interfering factors, for example, lighting, objects, colors and backgrounds, the image quality may vary. Adjust the baby unit angle or place the baby unit at a higher location to prevent glare and a


Status check - Two and more baby units

If you are viewing baby unit **21**, the **POWER** LED light of baby unit **11** turns on. As baby unit 22, 3, 4 is not being viewed, its **POWER** LED light flashes.

For VM924-2, VM924-3, VM924-4



🔹 If you power on only one baby unit, your parent unit may display 🍒 and the LINK LED light will flash.

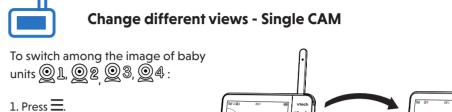

2. Enter **Monitoring mode** menu.

to view (**Q1**, **Q2**, **Q3** or **Q4**)



Select **Patrol** as your monitoring mode to alternately view the image from baby units **Q1**, **Q2**, **Q3**, **Q4** every 10 seconds.




Change different views - Split

■ Note

Select **Split** as your monitoring mode to view the images from multiple or all selected baby units at once.

MOUNT THE BABY UNIT (OPTIONAL)

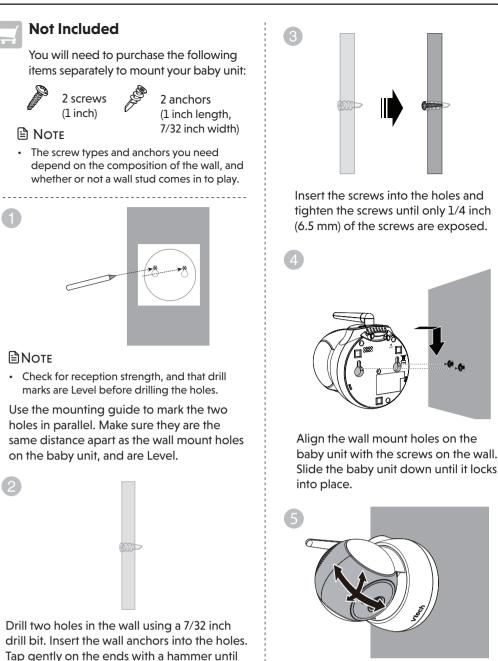

FREQUENTLY ASKED QUESTIONS

Below are the questions most frequently asked about the baby monito

Why does the baby monitor not respond normally?

2. Wait a few seconds before connecting power back to the baby units and the parent unit. 3. Turn on the baby units and the parent unit.

4. Wait for the parent unit to synchronize with the baby units. Allow up to one minute

1. Disconnect the power to the baby units and the parent unit.

Try the following (in the order listed) for common cure:

Why doesn't the baby unit and parent unit power-on light illuminate when the units are switched on?

Why does the parent

Why don't I hear a

sound/Why can't I hear

Why can't I establish a

connection? Why is the

connection lost every now

and then? Why are there

sound interruptions?

other sounds?

my baby cry?

unit react too quickly to

the parent unit and insert the adapter in a wall socket. Then, press and hold POWER to switch on the parent unit to establish connection with the baby unit. Perhaps the baby unit is not connected to the power. Insert the adapter plug into

Perhaps the parent unit is not connected to the power. Insert the adapter plug into

the baby unit and insert the adapter in a wall socket. Then, the baby unit will establish connection with the parent unit.

Why doesn't my parent Make sure the power is not controlled by an electronically controlled electric power unit charge while connected to AC power? The battery may be degraded through extended use or be defective. See Warranty for repair/replacement.

The screen is in black and white during night-time or in a dark room when the night Why is my screen in vision feature is activated. This is normal black and white? During night-time or in a dark room, the surroundings and other interfering factors, like lighting, objects, colors and backgrounds may affect the image quality on your blurry display on my

screen when viewing my parent unit screen. Adjust the baby unit angle or place the baby unit at a higher level to baby at night? prevent glare and a blurry display. The parent unit and baby units may be too close to each other. Why does the baby • Move the parent unit away from the baby unit until the noise stops: OR monitor produce a Turn down the volume of your parent unit. feedback noise?

The baby units may be out of range. Move the parent unit closer to the baby units (but Why does the parent not less than 3ft (1m)). unit beep?

The parent unit may not have enough charge for the parent unit to perform normally. Charge the battery in the parent unit until the battery icon becomes solid [III].

The temperature of your baby's room may be too high or too low.

The baby unit also picks up other sounds than those of your baby. Adjust the sound sensitivity level to a lower level or lower the parent unit speaker volume

The parent unit speaker volume may be too low. See Adjust parent unit speaker **volume** to increase the volume.

The baby units may be out of range. Move the parent unit closer to the baby units (but not less than 3ft (1m)).

Other electronic products and wireless products may cause interference with your baby monitor. Try installing your baby monitor as far away from these devices as pos-

If you power on only one baby unit, your parent unit may display **(a)**, and the **LINK**

THE RBRC SEAL



The RBRC seal on the Li-ion battery indicates that VTech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service vithin the United States and Canada.

The program provides a convenient alternative to placing used Li-ion batteries into the trash or municipal waste which may be illegal in your area.

VTech's participation makes it easy for you to drop off the spent battery at local retailers participating in the program or at authorized VTech product service centers. Please call **1 (800) 8 BATTERY*** for information on Li-ion battery recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.

FCC and IC regulations

This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the

Reorient or relocate the receiving antenna.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help

WARNING: Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void

bystander according to the intended usage of the product. This product has been tested and found to comply with the FCC criteria. e baby unit shall be installed and used such that parts of all persons' body are maintained at a distance of approximately 8 in (20 cm) or more. The transmitter and antenna of the parent unit shall be held at least 1 in (2.5 cm) from your face. This Class B digital apparatus complies with Canadian requirement:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation. Science and Economic Developmen The term "IC:" before the certification/registration number only signifies that the Industry Canada technical specifications were met. This product meets the applicable Innovation. Science and Economic Development Canada technical specifications.

CHARGING TESTING MODE

up to comply with the energy-conserving standards right out of the box. Follow the instructions to install and charge the battery. The CEC battery charging testing mode is activated while charging. Even if the parent unit is paired to baby units, the CEC battery charging testing mode is activated while it is powered off and charging. DISCLAIMER AND LIMITATION OF LIABILITY

Company: VTech Communications, Inc. Address: 9020 SW Washington Square Road - Ste 555 Tigard, OR 97223, United States Phone: 1 (800) 595-9511 in the U.S. or 1 (800) 267-7377 in Canada

FOR CETL COMPLIANCE ONLY

Mesures de sécurité importantes La plaque signalétique appliquée est située au bas du socle de l'unité du bébé...

The RBRC Seal and 1 (800) 8 BATTERY® are registered trademarks of Call2recycle, Inc

interference by one or more of the following measures Increase the separation between the equipment and receiver.

the user's authority to operate the equipment. This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user

Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The product complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The baby unit should be installed and operated with a minimum distance of 8 in (20 cm) between the baby unit and all persons' body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. This equipment complies also with Industry Canada RSS-102 with respect to

CALIFORNIA ENERGY COMMISSION BATTERY

This baby monitor meets the California Energy Commission (CEC) regulations for energy consumption. Your baby monitor is set

VTech Communications. Inc. and its suppliers assume no responsibility for any damage or loss resulting from the use of this user's manual. VTech Communications, Inc. and its suppliers assume no responsibility for any loss or claims by third parties that may arise

Lorsque vous utilisez votre appareil, vous devriez toujours suivre ertaines mesures de précaution de base afin de réduire les risques d'incendie, d'électrocution et de blessures corporelles, dont ceux

Observez toutes les instructions et mises en garde inscrites sur

L'installation par un adulte est requise.

MISE EN GARDE: N'installez pas l'unité du bébé à une hauteur supérieure à 2 mètres.

Ce produit ne remplace pas la surveillance adulte du nourrisson. La supervision du nourrisson est la responsabilité du parent ou de la personne qui s'occupe de l'enfant. Ce produit pourrait cesser de fonctionner et, par conséquent, vous ne devriez pas présumer qu'il continuera de fonctionner correctement pendant une période de temps donnée. De plus, il ne s'agit pas d'un instrument médical et ne devrait pas être utilisé comme tel. Ce produit est destiné à vous aider à superviser votre bébé.

N'utilisez pas cet appareil près de l'eau ni de toute autre source d'humidité, par exemple, près d'une baignoire, cuve à lessive, évier de cuisine, dans un sous-sol humide ni près d'une piscine, dans un soussol humide ni près d'une piscine, dans un soussol humide ou une douche. MISE EN GARDE: N'utilisez que la pile fournie. Il peut y avoir un risque d'explosion si un mauvais type de pile est utilisé pour le dispositif apaisant. La pile ne peut pas être soumise pour le dispositif apaisant. La pile ne peut pas être soumise pour le dispositif apaisant. La pile ne peut pas être soumise a des températures extrêmes élevées ou basses et a une faible pression atmosphérique a haute altitude pendant son utilisation, son entreposage ou son transport. Le fait de jeter la pile dans au feu ou dans un four chaud, ou d'écraser ou de couper mécaniquement la pile peut entrainer une explosion. Le fait de laisser la pile dans un environnement a température extrêmement élevée peut entrainer une explosion ou une fuite de liquide ou de gaz inflammable. Une pile soumise a une pression d'air extrêmement basse peut provoquer une explosion ou une fuite de liquide ou de gaz inflammable. Mettez au rebut la pile usagée conformément aux informations figurant dans la section Le sceau RBRC. N'utilisez que les adaptateurs inclus avec ce produit. L'utilisation d'un adaptateur dont la polarité ou la tension serait inadéquate risque d'endommager sérieusement le produit et mettre votre sécurité en péril.

Sortie: 5V DC 1A VTech Telecommunications Ltd. Telecommunications Ltd. ele: VT05EUS05100

Jiangxi Jian Aohai Technology Co., Ltd. Modèle : A318-050100W-US2 Informations sur les piles rechargeables : Modèle : ICR18650-2.6Ah-3.6V-1S1P
Lorsqu'ils sont branchés dans une prise de courant, les

adaptateurs secteur ont été conçus pour être orientés correctement, soit à la verticale ou au plancher. Les broches n'ont pas été conçues pour supporter le poids du bloc d'alimentation et le maintenir en place si celuici est branché dans une prise au plafond, sous une table ou dans un meuble. Pour les PRODUITS À BRANCHER À UNE PRISE DE COURANT, built de courant de trênt entre l'acceptance de la courant de a prise de courant doit être installée près du produit, afin d'assurer une accessibilité sécuritaire à la prise de courant.

10. Débranchez ce produit de la prise de courant avant de procéder au nettoyage. N'utilisez pas de nettoyants en aérosols. Utilisez un chiffon humide pour le nettoyer.

11. Ne coupez pas les cordons d'alimentation pour remplacer les fiches, car ceci peut présenter un danger potentiel. Ne laissez aucun objet reposer ni appuyer sur le cordon d'alimentation. N'installez pas cet appareil dans un endroit où l'on risque d'écraser le cordon d'alimentation ou de le piétiner.

Ne faites fonctionner cet appareil qu'avec le type d'alimentation indiqué sur l'étiquette. Si vous ne connaissez pas le type d'alimentation que vous possédez à votre domicile, consultez votre marchand ou votre compagnie Ne surchargez pas les prises de courant murales ni les rallonges électriques.
Ne placez pas cet appareil sur un chariot, meuble, trépied, sur partielle des cettages in tables de passibles de la contraction de

upport de montage ni table chancelants Les trous et ouvertures du boîtier, situés à l'arrière de l'appareil ou sous celui-ci, servent à aérer l'appareil. Pour l'empêcher de surchauffer, ne bloquez sous aucun prétexte ces ouvertures et n'empêchez pas l'aération adéquate de

LIMITED WARRANTY l'appareil en le plaçant sur un lit, divan, tapis ou toute autre surface similaire. De même, ne le positionnez pas à proximitir ni au-dessus d'une source de chaleur ou d'un calorifère. De plus, ne placez pas l'appareil dans un endroit avant de vous assurer qu'il y ait une bonne circulation d'air.

'enfoncez jamais d'objets à travers les ouvertures de et appareil, car ils pourraient entrer en contact avec des points de tension dangereux ou causer des courts-circuits qui peuvent dégénérer en incendies ou en risque d'électrocution. Ne renversez jamais de liquide dans ce Afin de réduire les risques d'électrocution, ne démontez pas cet appareil, mais apportez-le dans un centre de service autorisé. L'ouverture du boîtier ou le retrait de toutes pièces que contient cet appareil, à l'exception de l'accès autorisé à certaines portes ou ouvertures, risque de vous exposer à

remontage incorrect peut par la suite présenter des risques d'électrocution.

Vous devriez tester la réception chaque fois que vous mettez l'appareil en fonction.

Examinez les composantes afin de vérifier si celles-ci ne sont oas endommagées. Il existe un très faible risque de perte de confidentialité avec certains appareils électroniques (autres écoute-bébés, téléphones sans fils etc.). Pour l'éviter, s'assurer que le produ n'a jamais été utilisé avant l'achat, réinitialiser l'unité de façon périodique, éteindre l'écoute-bébé quand il n'est pas en cours d'utilisation.

Les enfants devraient être supervisés afin de vous assurer

Les entants devraient etre supervises atin de vous assurer qu'ils ne jouent pas avec l'appareil.

Le produit n'est pas conçu pour être utilisé par des personne (incluant des enfants) aux capacités physiques, sensorielles ou mentales réduites ou qui manquent d'expérience et de connaissances, à moins qu'on leur ait donné suffisamment de supervision ou d'instructions relativement à l'utilisation de de supervision du d'instructions relativement à l'utilisation de

Mises en garde sez le produit à une température entre 0°C Utilisez et entreposez le (32°F) et 40°C (104°F).

as près d'une source de chauffage. Le bloc-piles ne doit pas être exposé à la chaleur excessive telle que la lumière du soleil ou au feu. Avertissement - Risque de strangulation - Les enfants se sont ÉTRANGLES dans des cordons. Gardez ce cordon hors de portée des enfants (à plus de 0,9 m). N'enlevez pas cette

Ne jamais placer le moniteur à l'intérieur du berceau ou du parc de bébé. Ne jamais couvrir le moniteur ou l'unité (s) portative avec un article tel une serviette ou une couverture D'autres équipements électroniques peuvent produire des interférences sur votre moniteur vidéo et audio. Tentez d'installer votre moniteur vidéo ou audio à l'écart des appareil électroniques tels que des routeurs sans fil, radios, télép cellulaires, interphones, moniteurs, téléphones, ordinateurs personnels, électroménagers et téléphones sans fil.

Stimulateurs cardiaques implantés dans l'organisme Les simulateurs cardiaques (ne s'applique qu'aux dispositifs numériques sans fil):
L'organisme 'Wireless Technology Research, LLC (WTR)', une firme de recherche indépendante, a mené une évaluation pluridisciplinaire des interférences entre les téléphones sans fil portaitis et les stimulateurs cardiaques implantés dans l'organisme Appuyée par l'Administration des alliments et drogues (FDA) des États-Unis, la firme WTR recommande aux médecins:

Avis aux détenteurs de stimulateurs cardiaques

Vous devises pastenir les dispertificants fils à un moins its.

stimulateur cardiaque, tel que dans une poche de chemise orsque celui-ci est en marché l'étude effectuée par l'organisme WRS n'a pas identifié de risque pour les défenteurs de simulateurs cardiaques causés par les gens qui utilisent dispositifs sans fil à proximité de ceux-ci. Champs électromagnétiques (EMF)
Ce produit de VTech est conforme à toutes les normes se rapportant aux champs électromagnétiques (EMF) standard. Si vous le manipulez correctement en suivant les instructions de ce guide, son utilisation sera sécuritaire pendant de nombreuses années, selon les meilleures évidences scientifiques dont nous disposons aujourd'hui.

ous devriez maintenir les dispositifs sans fil à au moins six ouces du simulateur cardiaque.

The manufacturer of this VTech Product warrants to the holder of a valid proof of purchase ("Consumer" or "you" package ("Product") are free from defects in material and workmanship, pursuant to the following terms and conditions, when installed and used normally and in accordance with the Product operating instructions. This limited warranty extends only to the Consumer for Products ourchased and used in the United States of America and

What will VTech do if the Product is not free from defects in materials and workmanship during the limited warranty period ("Materially Defective Product")?

During the limited warranty period, VTech's authorized service representative will repair or replace at VTech's option without charge, a Materially Defective Product. If we repair the Product, we may use new or refurbished replacemen parts. If we choose to replace the Product, we may replace it with a new or refurbished Product of the same or similar design. We will retain defective parts, modules or equipment, Repair or replacement of the Product, at VTech's option, is your exclusive remedy. VTech will return the repaired or replacement Products to you in working condition. You should expect the repair or replacement to

The limited warranty period for the Product extends for repaired or replacement Product for a period of either (a) one-year warranty; whichever is longe

This limited warranty does not cover: 1. Product that has been subjected to misuse, accident,

2. Product that has been damaged due to repair, alteration or modification by anyone other than an authorized service representative of VTech; or

caused by signal conditions, network reliability, or cable or antenna systems; or 4. Product to the extent that the problem is caused by use

5. Product whose warranty/quality stickers, product serial number plates or electronic serial numbers have been removed, altered or rendered illegible; or 6. Product purchased, used, serviced, or shipped for repair from outside the United States of America or Canada, or

item 2 below); or 8. Charges for installation or set up, adjustment of custome controls, and installation or repair of systems outside the 9511. In Canada, go to www.vtechcanada.com or call manual - a check of the Product's controls and features may

covered by this limited warranty.

take approximately 30 days.

How long is the limited warranty period? ONE (1) YEAR from the date of purchase. If VTech repairs or replaces a Materially Defective Product under the terms of 90 days from the date the repaired or replacement Product is shipped to you or (b) the time remaining on the original

What is not covered by this limited warranty?

shipping or other physical damage, improper installation, mal operation or handling, neglect, inundation, fire, water or other liquid intrusion: or

3. Product to the extent that the problem experienced is

with non-VTech accessories; or

but not limited to Products used for rental purposes); or 7. Product returned without a valid proof of purchase (see

used for commercial or institutional purposes (including

How do you get warranty service? To obtain warranty service in the USA, please visit our website at www.vtechbabycare.com or call 1 (800) 595

1 (800) 267-7377. NOTE: Before calling for service, please review the user's

save you a service call. Except as provided by applicable law, you assume the risk of loss or damage during transit and transportation and are esponsible for delivery or handling charges incurred in the transport of the Product(s) to the service location. VTech will return repaired or replaced Product under this limited warranty. Transportation, delivery or handling charges are prepaid. VTech assumes no risk for damage or loss of the Product in transit. If the Product failure is not covered by this limited warranty, or proof of purchase does not meet the terms of this limited warranty, VTech will notify you and will request that you authorize the cost of repair prior to any further repair activity. You must pay for the cost of repair and return shipping costs for the repair of Products that are not

What must you return with the Product to get warranty

1. Return the entire original package and contents including the Product to the VTech service location along with a

2. Include a "valid proof of purchase" (sales receipt) identifying the Product purchased (Product model) and the date of purchase or receipt; and

address, and telephone number.

description of the malfunction or difficulty; and

This warranty is the complete and exclusive agreemen between you and VTech. It supersedes all other written or oral communications related to this Product. VTech provides no other warranties for this Product. The warranty exclusively describes all of VTech's responsibilities regarding the Product. There are no other express warranties. No one is authorized to make modifications to this limited warranty and you should not rely on any such modification. State/Provincial Law Rights: This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state or province to province.

Limitations: Implied warranties, including those of fitness for a particular purpose and merchantability (an unwritter warranty that the Product is fit for ordinary use) are limited to one year from the date of purchase. Some states/ rovinces do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. In no event shall VTech be liable for any indirect, special, incidental, consequential, or similar damages (including, but not limited to lost profits or revenue, inability to use the Product or other associated equipment, the cost of substitute equipment, and claims by third parties) resulting from the use of this Product. Some states/provinces do not allow the exclusion or limitation of incidental or nsequential damages, so the above limitation or exclusion may not apply to you.


Please retain your original sales receipt as proof of purchase.

Mounting guide

1. Tape this mounting guide onto the wall, aligning it with the desired mounting spot.

guide to mark the hole positions on the wall.

mark the hole positions again for better visibility. 4. After marking the hole positions on the wall, you can

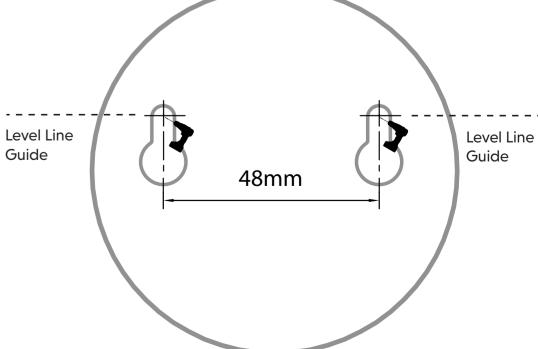



Adjust the camera anale

the wall anchors are flush with the wall.

2. Press a pencil or pin through the crosses on the mounting

3. Remove the mounting guide and use a pencil to clearly

follow the steps provided in the quick start guide to drill the holes and insert screws.

